



Document Name	M043GW32 R0 Product Information			Page 1 of 26	
Document No.		Made/Revised date	2014/04/09	Ver.	00

# Product Information

**To:** 苏州与来视讯科技有限公司

**Product Name:** M043GW32 R0

**Document Issue Date:** 2014/03/12

Customer
<u>SIGNATURE</u>
_____
_____
_____
<b>Please return 1 copy for your confirmation with your signature and comments.</b>

InfoVision Optoelectronics
<u>SIGNATURE</u>
REVIEWED BY
QA
_____
PREPARED BY
FAE
_____

- Note: 1. Please contact InfoVision Company. before designing your product based on this product.  
2. The information contained herein is presented merely to indicate the characteristics and performance of our products. No responsibility is assumed by IVO for any intellectual property claims or other problems that may result from application based on the module described herein.

FQ-7-30-0-009-03D



Document Name	M043GW32 R0 Product Information			Page 3 of 26	
Document No.		Made/Revised date	2014/04/09	Ver.	00

## CONTENTS

<b>1.0</b>	<b>General Descriptions .....</b>	<b>4</b>
<b>2.0</b>	<b>Absolute Maximum Ratings .....</b>	<b>6</b>
<b>3.0</b>	<b>Pixel Format Image .....</b>	<b>7</b>
<b>4.0</b>	<b>Optical Characteristics .....</b>	<b>8</b>
<b>5.0</b>	<b>Backlight Characteristics .....</b>	<b>11</b>
<b>7.0</b>	<b>Interface Timings.....</b>	<b>14</b>
<b>8.0</b>	<b>Power Consumption .....</b>	<b>17</b>
<b>9.0</b>	<b>Power ON/OFF Sequence .....</b>	<b>18</b>
<b>10.0</b>	<b>Mechanical Characteristics .....</b>	<b>19</b>
<b>11.0</b>	<b>Package Specification.....</b>	<b>22</b>
<b>12.0</b>	<b>Reliability Conditions.....</b>	<b>23</b>
<b>13.0</b>	<b>Lot Mark .....</b>	<b>24</b>
<b>14.0</b>	<b>General Precaution .....</b>	<b>25</b>

Document Name	M043GW32 R0 Product Information			Page 4 of 26	
Document No.		Made/Revised date	2014/04/09	Ver.	00

## 1.0 General Descriptions

### 1.1 Introduction

The M043GN32 is a color active matrix thin film transistor (TFT) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching device. It is composed of a TFT LCD panel, a timing controller, voltage reference, common voltage, column driver, and row driver circuit. This TFT LCD has a 4.3-inch diagonally measured active display area with WQVGA resolution (480 horizontal by 272 vertical pixels array).

### 1.2 Features

- 4.3" TFT-LCD Panel
- LED Backlight System
- Supported WQVGA Resolution
- Compatible with RoHS Standard

### 1.3 Product Summary


Items	Specification	Unit
Screen Diagonal	4.3	inch
Active Area (H x V)	95.04 x 53.856	mm
Number of Pixels (H x V)	480 x 272	-
Pixel Pitch (H x V)	0.198 x 0.198	mm
Pixel Arrangement	R.G.B. Stripe	-
Display Mode	TN, Normally White	-
White Luminance	(450) (Typ.) (TBD) (Min)	cd /m <sup>2</sup>
Contrast Ratio	(500) (Typ.) (400) (Min)	-
Response Time	(16) (Typ.) (25) (Max)	ms
Input Voltage	(3.3) (Typ.)	V
Power Consumption	TBD (Max.)	W
Weight	TBD (Max.)	g
Outline Dimension (H x V x D)	(105.5) (H) x (67.2) (V) x (5.3) (D)	mm
Electrical Interface (Logic)	TTL	-
Support Color	(16.7)M	-
Optimum Viewing Direction	6 o'clock (Gray Scale Inversion Direction)	-
Surface Treatment	Anti-glare & hardness 3H	-

Document Name	M043GW32 R0 Product Information			Page 5 of 26	
Document No.		Made/Revised date	2014/04/09	Ver.	00

**1.4 Functional Block Diagram**

Figure 1 shows the functional block diagram of the LCD module.

**Figure 1 Block Diagram**

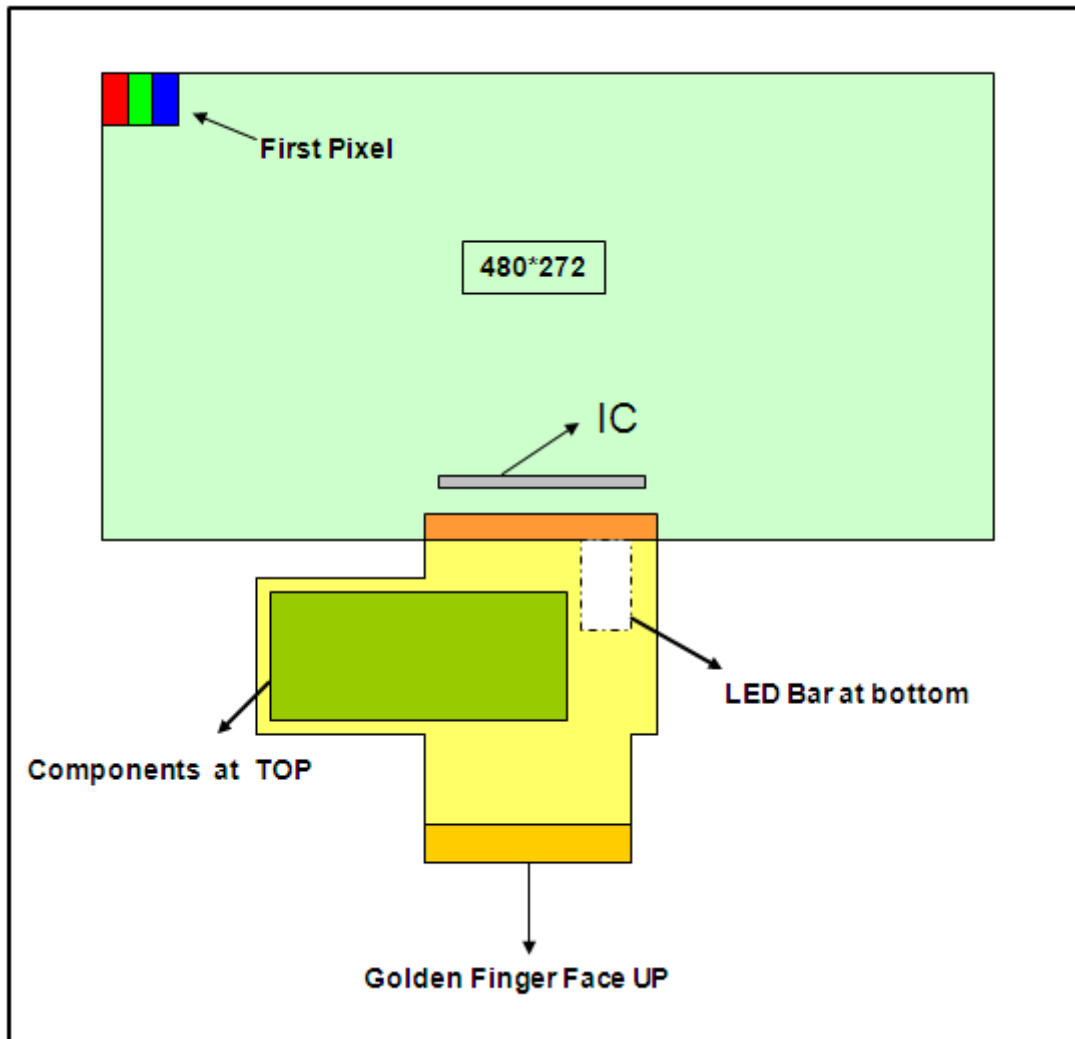

Document Name	M043GW32 R0 Product Information			Page 6 of 26	
Document No.		Made/Revised date	2014/04/09	Ver.	00

**2.0 Absolute Maximum Ratings**

**Table 1 Absolute Ratings of Environment**

Item	Symbol	Min.	Max.	Unit	Conditions
Supply Voltage	V <sub>DD</sub>	(-0.3)	(3.96)	V	(1)
Operating Temperature	TOP	(-20)	(70)	°C	(1) (2) (3) (4)
Operating Humidity	HOP	(10)	(85)	%RH	-
Storage Temperature	TST	(-30)	(80)	°C	-
Storage Humidity	HST	(10)	(90)	%RH	-


Note (1): Humidity: 85%RH Max. (T<=40°C) Note static electricity.

Maximum wet bulb temperature at 39°C or less. (T>40°C) No condensation.

Note (2): There is a possibility of causing deterioration in the irregularity and others of the screen and the display fineness though the liquid crystal module doesn't arrive at destruction when using it at 80~85°C or -20°C.

Note (3): There is a possibility of causing the fineness deterioration by the prolonged use in the (high temperature) humidity environment (60% or more).

Note (4): In the operating temperature item, the low temperature side is the ambient temperature regulations. The high temperature side is the panel surface temperature regulations.

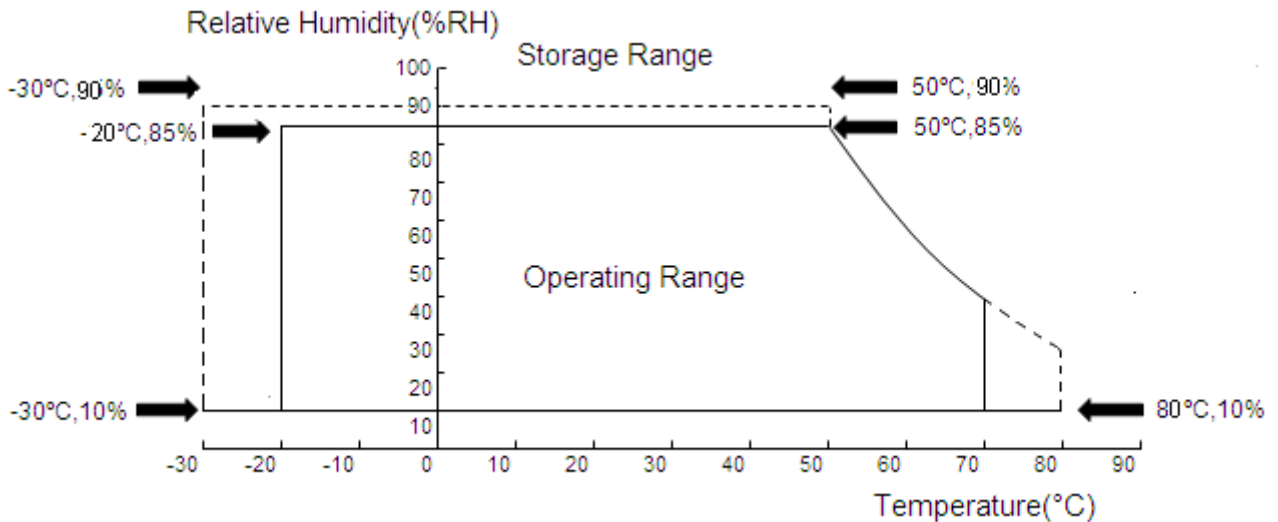


Document Name	M043GW32 R0 Product Information			Page 7 of 26	
Document No.		Made/Revised date	2014/04/09	Ver.	00

**3.0 Pixel Format Image**

Figure 3 shows the relationship of the input signals and LCD pixel format image.

**Figure 2 Pixel Format**

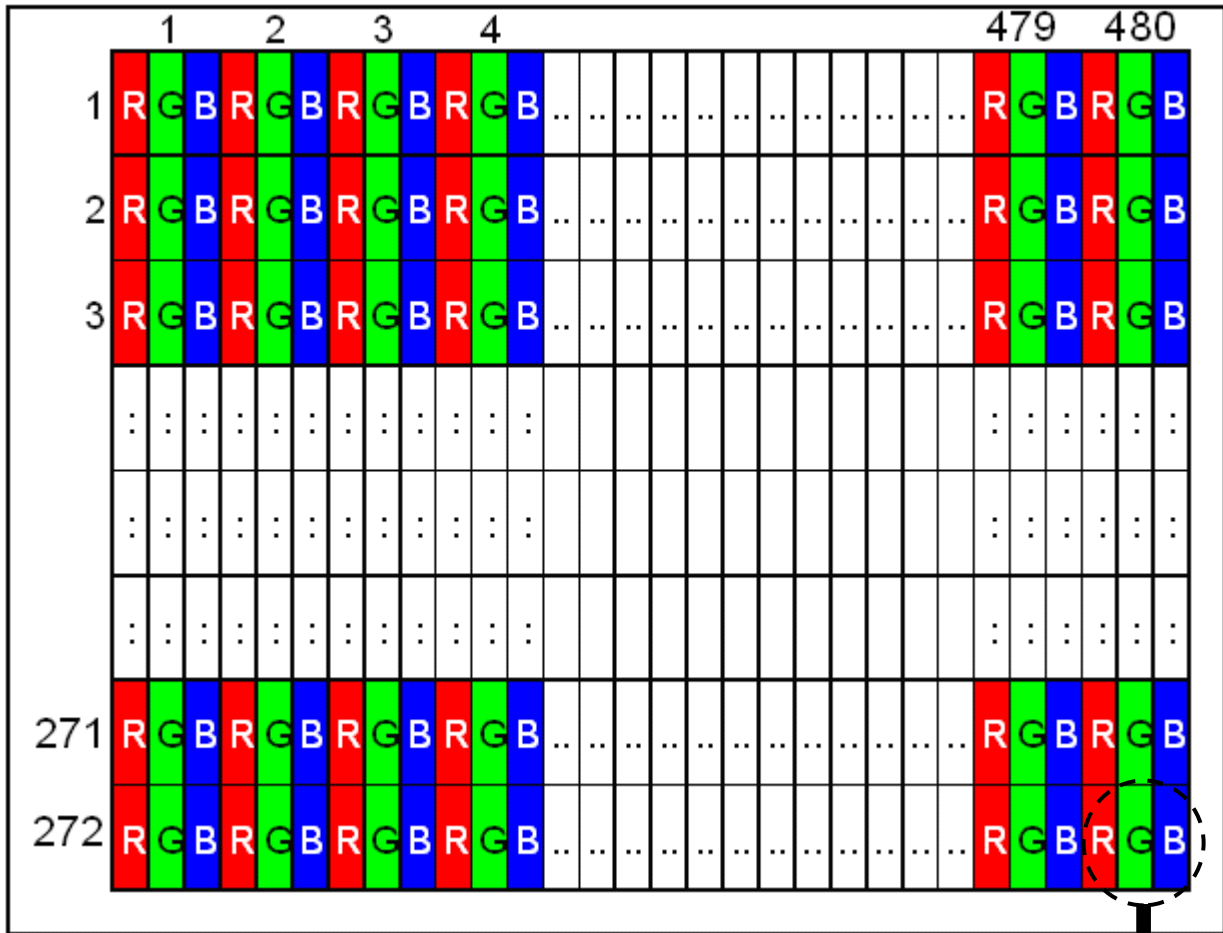

R Dot +G Dot +B Dot=1 Pixel

Document Name	M043GW32 R0 Product Information			Page 8 of 26	
Document No.		Made/Revised date	2014/04/09	Ver.	00

#### 4.0 Optical Characteristics

The optical characteristics are measured under stable conditions as following notes.

**Table 2 Optical Characteristics**

Item	Conditions	Min.	Typ.	Max.	Unit	Note		
Viewing Angle (CR>10)	Horizontal	$\theta_{x+}$	(65)	(75)	-	degree	(1) (2)	
		$\theta_{x-}$	(65)	(75)	-			
	Vertical	$\theta_{y+}$	(50)	(60)	-			
		$\theta_{y-}$	(60)	(70)	-			
Contrast Ratio	Center	(400)	(500)	-	-	(1), (3)		
Response Time	Rising + Falling	-	(16)	(25)	ms	(1), (4)		
Color Chromaticity (CIE1931)	Red x	Typ. -0.05	(0.629)	Typ. +0.05	-	(1), (2) $\theta_x=\theta_y=0^\circ$		
	Red y		(0.358)		-			
	Green x		(0.313)		-			
	Green y		(0.633)		-			
	Blue x		(0.150)		-			
	Blue y		(0.063)		-			
	White x		Typ. -0.05		(0.310)		Typ. +0.05	-
	White y		(0.330)		-			
NTSC	-	(72)	-	%				
Luminance Uniformity	9Points	(70)	-	-	%	(1), (5)		


**Note (1) Measurement Setup:**

The LCD module should be stabilized at given temperature(25°C) for 15 minutes to Avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting backlight for 15 minutes in a windless room.




Document Name	M043GW32 R0 Product Information			Page 9 of 26	
Document No.		Made/Revised date	2014/04/09	Ver.	00

**Figure 3 Measurement Setup**

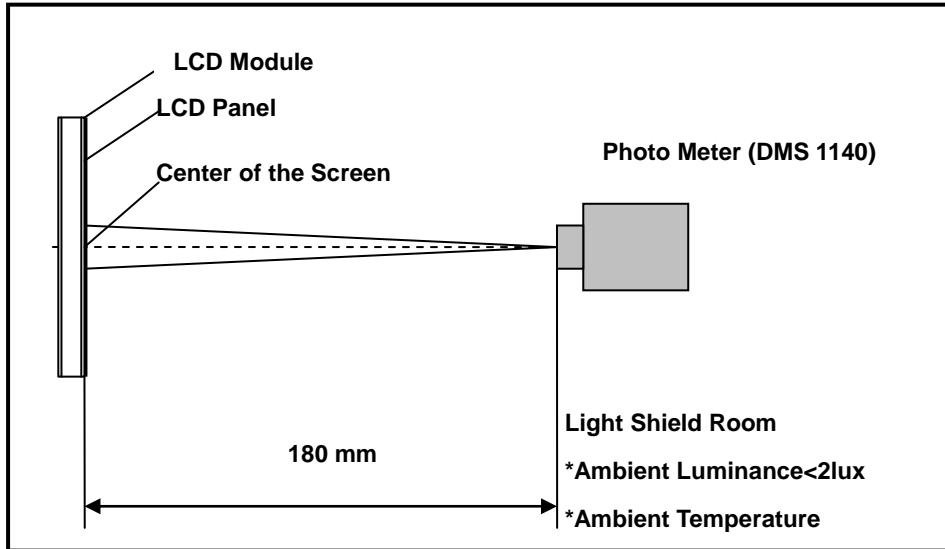

Note (2) Definition of Viewing Angle

**Figure4 Definition of Viewing Angle**

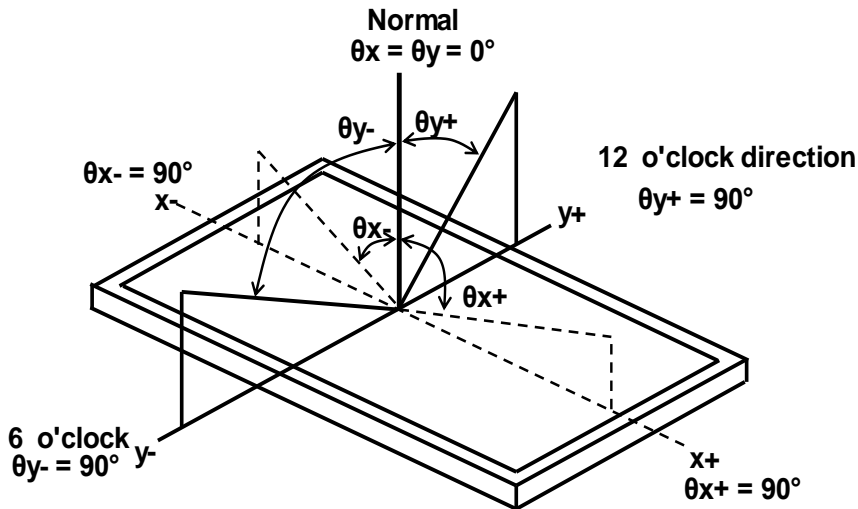

Note (3) Definition Of Contrast Ratio (CR)

The contrast ratio can be calculated by the following expression


$$\text{Contrast Ratio (CR)} = L_{255} / L_0$$

L255: Luminance of gray level 255, L0: Luminance of gray level 0

Note (4) Definition Of Response Time (TR, TF)

Document Name	M043GW32 R0 Product Information			Page 10 of 26	
Document No.		Made/Revised date	2014/04/09	Ver.	00

**Figure 5 Definition of Response Time**

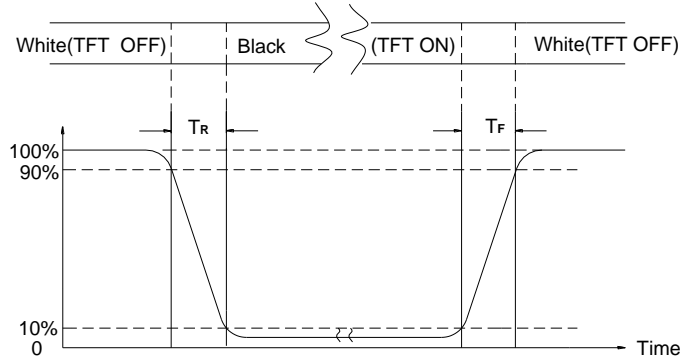


Note (5) Definition Of Luminance Uniformity (Ref.: Active Area)

Measure the luminance of gray level 255 at 9 points.

$$UNF( 9 \text{ pts} ) = \frac{\text{Min}( L1, L2, \dots L9 )}{\text{Max}( L1, L2, \dots L9 )}$$

**Figure 6 Measurement Locations Of 9 Points**

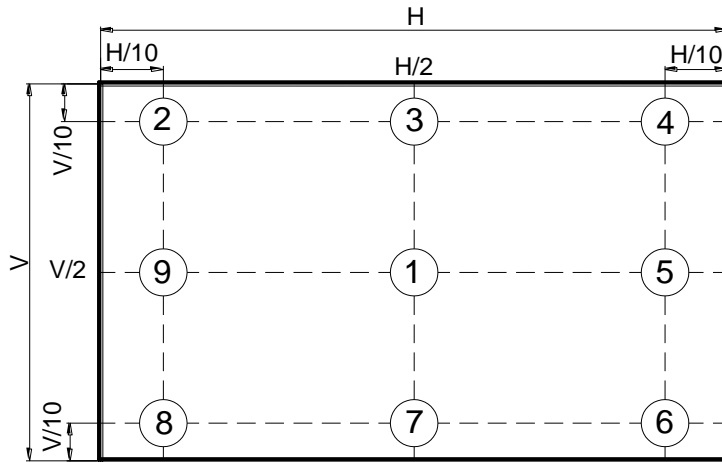



Document Name	M043GW32 R0 Product Information			Page 11 of 26	
Document No.		Made/Revised date	2014/04/09	Ver.	00

## 5.0 Backlight Characteristics

### 5.1 Parameter Guideline Of LED Backlight

Table 3 Parameter Guideline for LED Backlight

Item	Symbol	Min.	Typ.	Max.	Units	Note
LED Input Voltage	$V_{LED}$	(25.2)	(28.8)	(32.4)	V	(2),(3)
LED Power Consumption	$P_{LED}$	-	-	(2.592)	W	(2),(3)
LED Forward Voltage	$V_F$	(2.8)	(3.2)	(3.6)	V	(2)
LED Forward Current	$I_F$	-	(80)	-	mA	
LED Life Time	LT	(50,000)	-	-	Hours	(1)(2)

Note (1) The LED life time define as the estimated time to 50% degradation of initial luminous.

Note (2) Operating temperature 25°C, humidity 55%RH.

Note (3) A higher LED power supply voltage will result in better power efficiency. Keep the  $V_{LED}$  between 28.8V and 32.4V is strongly recommended.

## 6.0 Electrical Characteristics

### 6.1 Interface Connector

Table 4 Signal Connector Type

Item	Description
FPC Down Connector ( 40pin pitch=0.5mm )	Connector recommended model: FH19SC-40S-0.5SH Manufactured by Hirose.



Document Name	M043GW32 R0 Product Information			Page 12 of 26	
Document No.		Made/Revised date	2014/04/09	Ver.	00


**Table 5 Signal Connector Pin Assignment**

Pin No.	Symbol	Description	Note
1	VLED-	Power for LED backlight cathode	-
2	VLED+	Power for LED backlight anode	-
3	GND	Power Ground	-
4	VDD	Power voltage	-
5	R0	Red data(LSB, If 18-bit parallel RGB data input, please connect to GND)	-
6	R1	Red data(If 18-bit parallel RGB data input, please connect to GND)	-
7	R2	Red data	-
8	R3	Red data	-
9	R4	Red data	-
10	R5	Red data	-
11	R6	Red data	-
12	R7	Red data(MSB)	-
13	G0	Green data(LSB, If 18-bit parallel RGB data input, please connect to GND)	-
14	G1	Green data(If 18-bit parallel RGB data input, please connect to GND)	-
15	G2	Green data	-
16	G3	Green data	-
17	G4	Green data	-
18	G5	Green data	-
19	G6	Green data	-
20	G7	Green data(MSB)	-
21	B0	Blue data(LSB, If 18-bit parallel RGB data input, please connect to GND)	-
22	B1	Blue data(If 18-bit parallel RGB data input, please connect to GND)	-
23	B2	Blue data	-
24	B3	Blue data	-
25	B4	Blue data	-
26	B5	Blue data	-
27	B6	Blue data	-

Document Name	M043GW32 R0 Product Information			Page 13 of 26	
Document No.		Made/Revised date	2014/04/09	Ver.	00

28	B7	Blue data(MSB)	-
29	GND	Power ground	-
30	CLK	Pixel clock	-
31	DISP	Display on/off	-
32	HSYNC	Horizontal sync signal	-
33	VSYNC	Vertical sync signal	-
34	DE	Data Enable	-
35	RSV	Reverse Scan Function [H: Enable; L/NC: Disable]	(1)
36	GND	Power ground	-
37	NC	No connection	-
38	NC	No connection	-
39	NC	No connection	-
40	NC	No connection	-

Note (1)

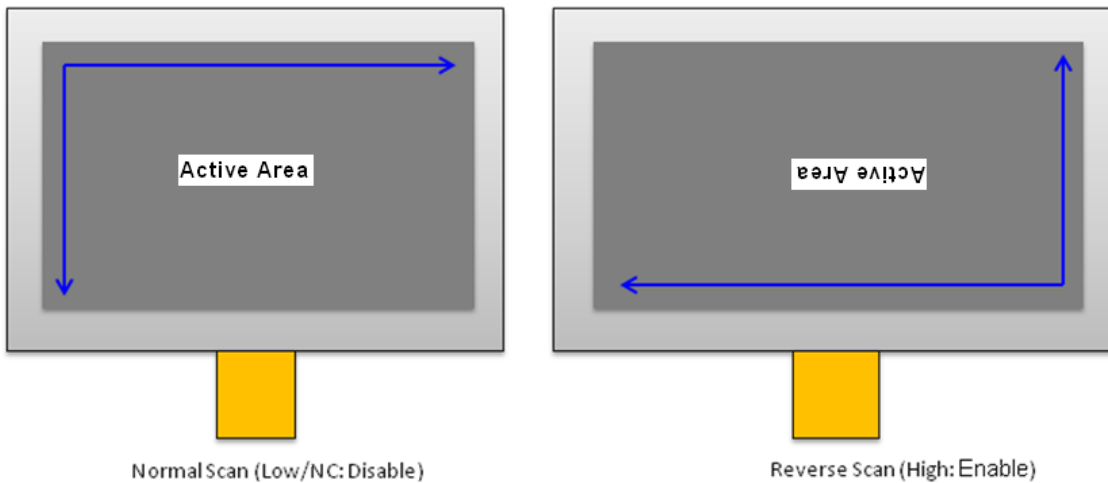

Document Name	M043GW32 R0 Product Information			Page 14 of 26	
Document No.		Made/Revised date	2014/04/09	Ver.	00

## 6.2 Power Voltage Specification

**Table 6 Power Voltage**

Item	Symbol	Min.	Typ.	Max.	Units	Note
Input Power Supply Voltage	V DD	(3.0)	(3.3)	(3.6)	V	TA= 25° C
Input High Level	VIH	(VDDX0.7)	-	(VDD)	V	2.5<VDD<3.6
Input signal voltage	VIL	(0)	-	(VDDX0.3)	V	2.5<VDD<3.6
Output High Level	VOH	(VDDX0.9)	-	(VDD)	V	Iout=100uA
Output Low Level	VOL	(0)	-	(VDDX0.1)	V	Iout=100uA

Note (1) Operating temperature 25°C, humidity 55%RH.

## 7.0 Interface Timings

### 7.1 Timing Characteristics

Synchronization method should be DE mode.


**Table 7 Interface Timings**

Parameter	Symbol	Unit	Min.	Typ.	Max.
DCLK	fdck	MHz	-	(9)	(15)
H Total Time	Th	clocks	(520)	(525)	(800)
H Active Time	HA	clocks	480	480	480
H Front Porch	Thf	clocks	(2)	(2)	-
H Pulse Width	THP	clocks	(2)	(41)	(41)
H Back Porch	Thb	clocks	(2)	(2)	(41)
V Total Time	Tv	lines	(277)	(288)	(400)
V Active Time	VA	lines	272	272	272
V Front Porch	Tvf	lines	(1)	(4)	-
V Pulse Width	TVP	lines	(1)	(10)	(11)
V Back Porch	Tvb	lines	(1)	(2)	(11)
V Frequency	fv	Hz	-	(60)	-

Note: H Blanking Time and V Blanking Time can not be changed at every frame.

Document Name	M043GW32 R0 Product Information			Page 15 of 26	
Document No.		Made/Revised date	2014/04/09	Ver.	00

**Figure 7 Timing Characteristics**

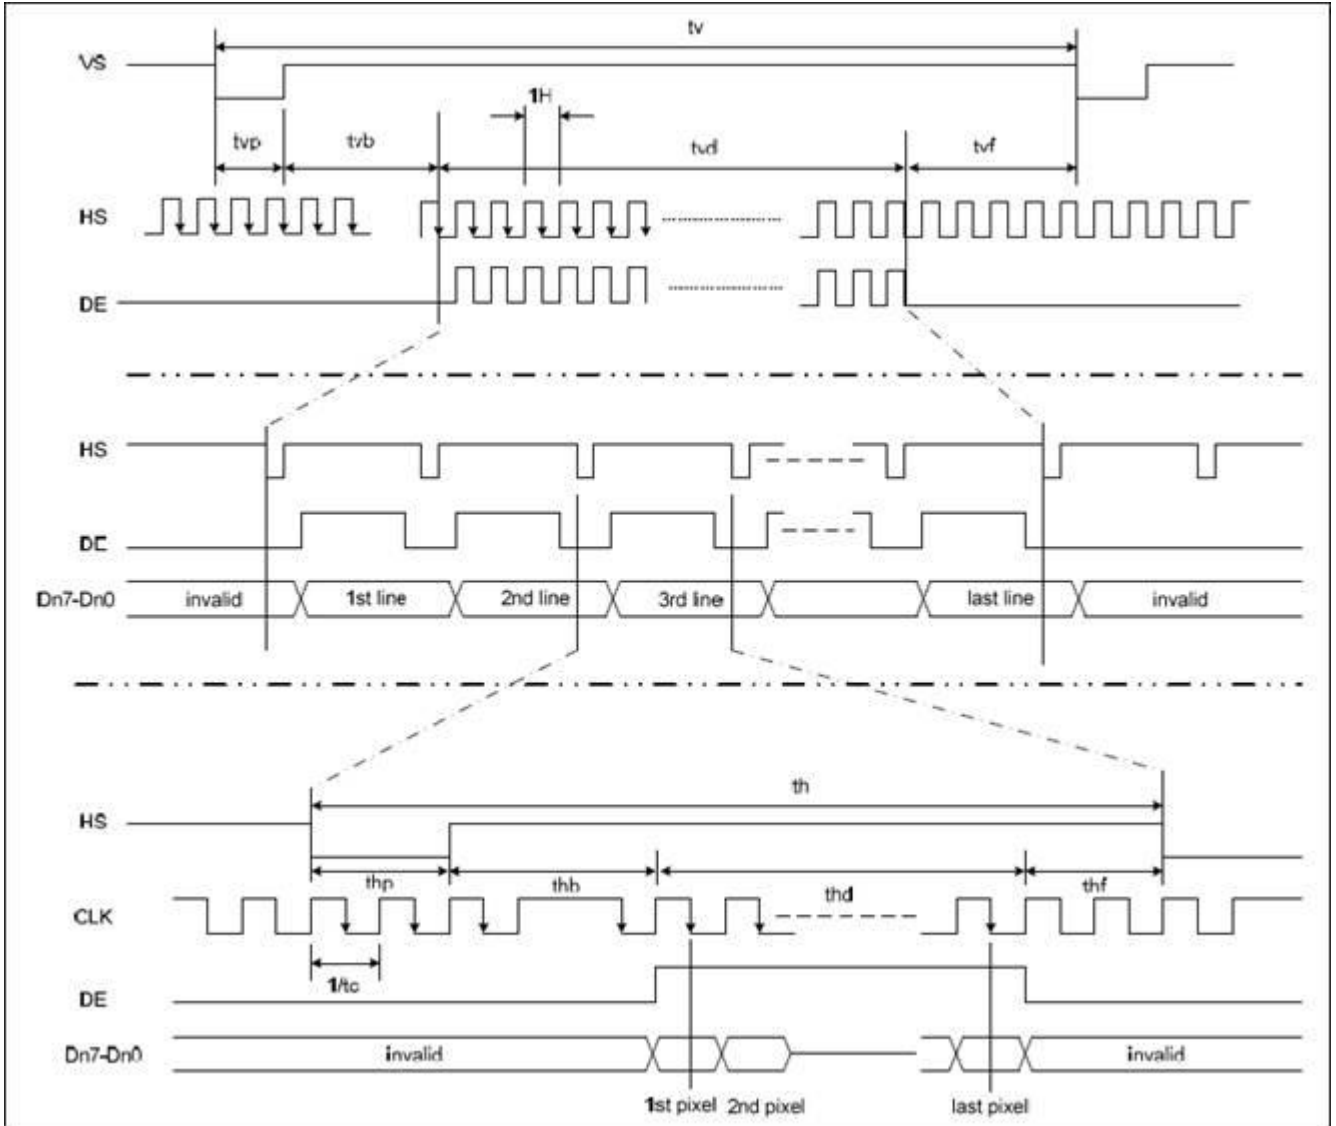

Note: TES is data enable signal setup time.

**7.2 Input setup timing requirement**


Parameter	Symbol	Unit	Min.	Typ.	Max.
DISP setup time	$t_{diss}$	ns	(10)	-	-
DISP hold time	$t_{dish}$	ns	(10)	-	-
Clock period	$PW_{CLK}^{(1)}$	ns	(66.7)	-	-
Clock pulse high period	$PWH^{(1)}$	ns	(26.7)	-	-
Clock pulse low period	$PWL^{(1)}$	ns	(26.7)	-	-
Hsync setup time	$t_{hs}$	ns	(10)	-	-
Hsync hold time	$t_{hh}$	ns	(10)	-	-

Document Name	M043GW32 R0 Product Information			Page 16 of 26	
Document No.		Made/Revised date	2014/04/09	Ver.	00

Data setup time	$t_{ds}$	ns	(10)	-	-
Data hold time	$t_{dh}$	ns	(10)	-	-
DE setup time	$t_{des}$	ns	(10)	-	-
DE hold time	$t_{deh}$	ns	(10)	-	-
Vsync setup time	$t_{vhs}$	ns	(10)	-	-
Vsync hold time	$t_{vhh}$	ns	(10)	-	-

Note:(1) For parallel interface, maximum clock frequency is 15MHz

**Figure 8 Input setup timing requirement**

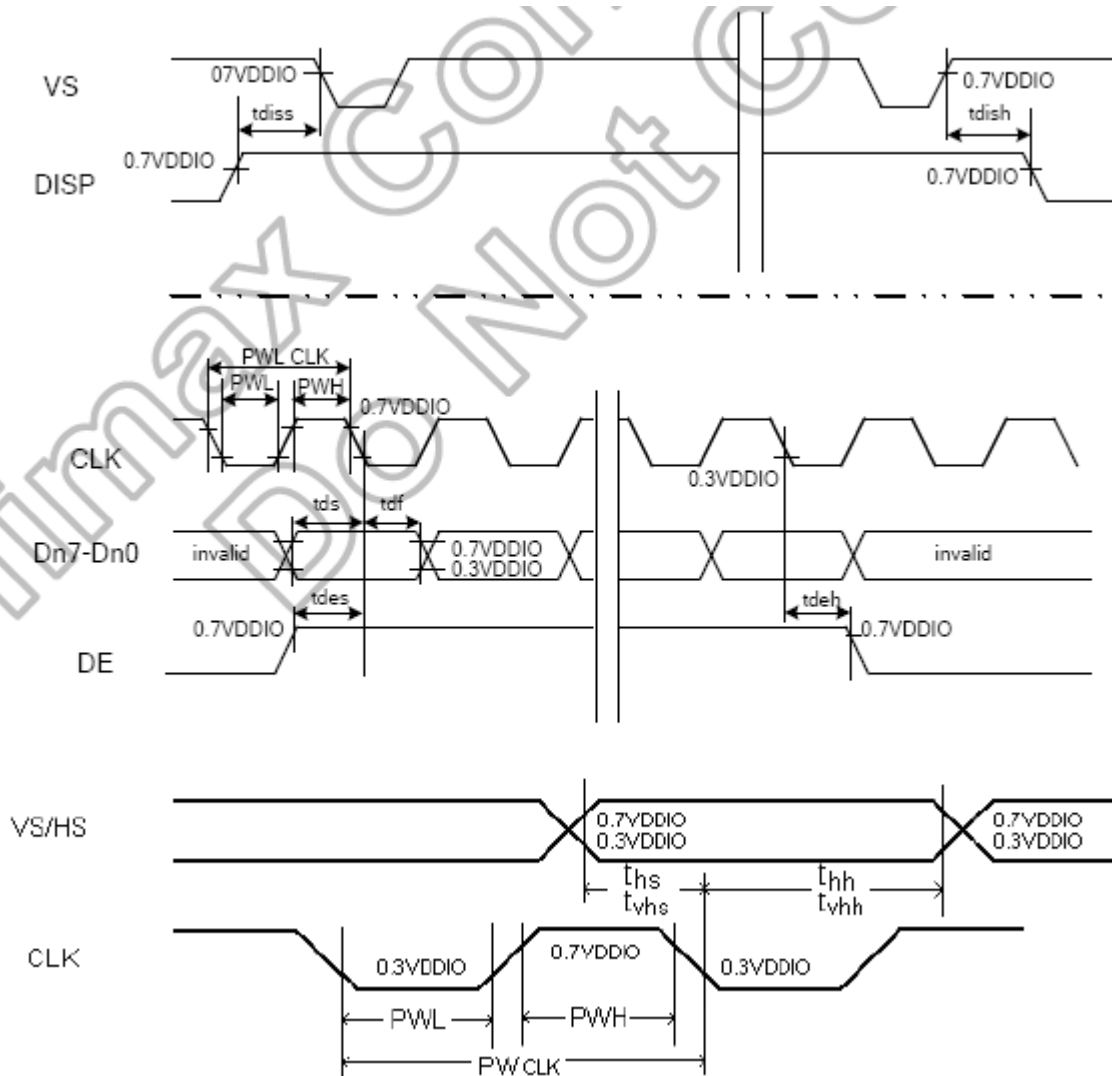



Document Name	M043GW32 R0 Product Information			Page 17 of 26	
Document No.		Made/Revised date	2014/04/09	Ver.	00

### 8.0 Power Consumption

Input power specifications are as follows.

**Table 8 Power Consumption**

Item	Symbol	Min.	Typ.	Max.	Units	Note	
LCD Drive Voltage (Logic)	VDD	(3.0)	(3.3)	(3.6)	V	(1), (3)	
VDD Current	Black Pattern	IDD	-	-	(0.017)	A	(2), (3)
	V-Stripe Pattern		-	-	(0.02)		
VDD Power Consumption	Black Pattern	PDD	-	-	(0.05)	W	
	V-Stripe Pattern		-	-	(0.06)		
Rush Current	Irush	-	-	(2.0)	A	(3),(4)	
Allowable Logic/LCD Drive Ripple Voltage	VDDrp	-	-	(200)	mV	(3)	

Note (1) VDD Power Dip Condition


If  $V_{TH} < VDD \leq V_{min}$ , then  $t_d \leq 10ms$ ; when the voltage return to normal our panel must revive automatically.

Note (2) Frame Rate=60Hz, VDD=3.3V, DC Current.

Note (3) Operating temperature 25°C, humidity 55%RH.

Note (4) The reference measurement circuit of rush current.

**Figure 9 inrush current**

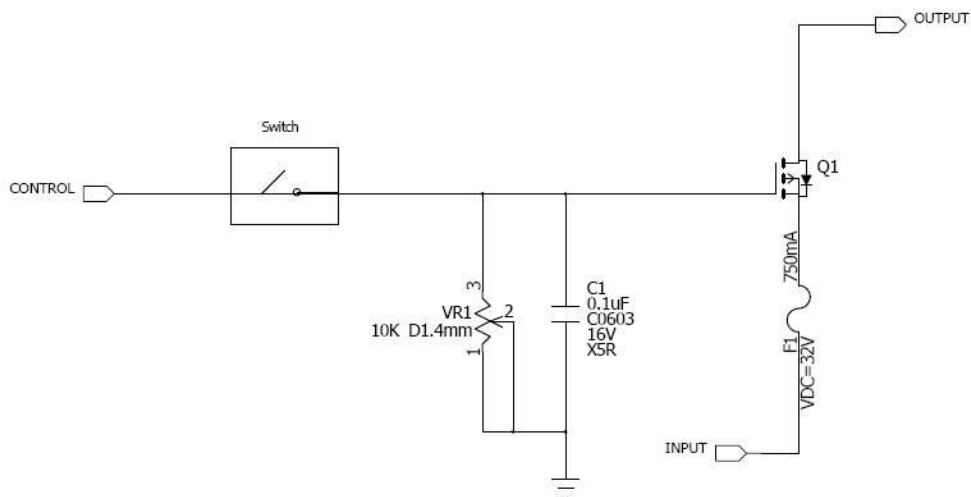


Document Name	M043GW32 R0 Product Information			Page 18 of 26	
Document No.		Made/Revised date	2014/04/09	Ver.	00


### 9.0 Power ON/OFF Sequence

VDD power on/off sequence is as follows. Interface signals are also shown in the chart. Signals from any system shall be Hi- resistance state or low level when VDD is off.

**Figure 10 Power On Sequence**

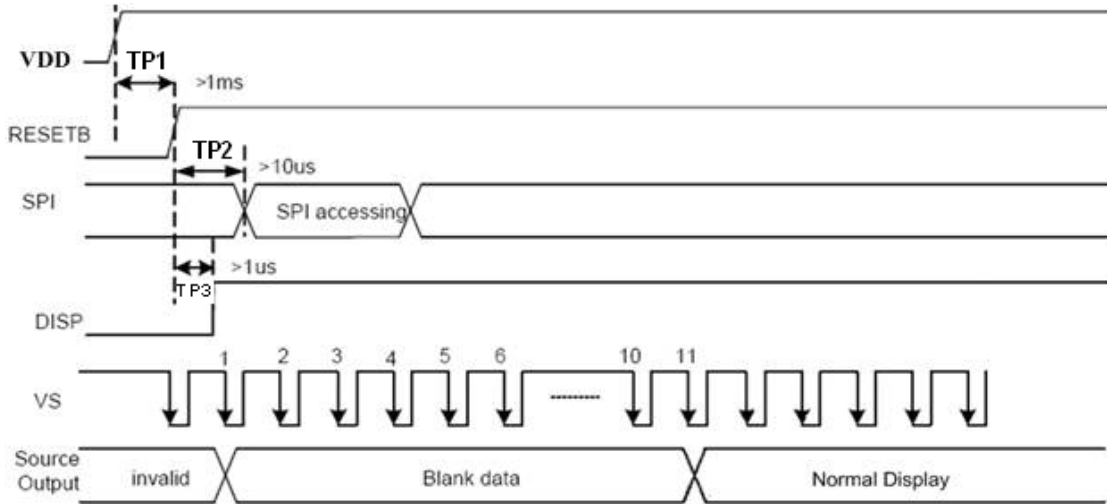

**Figure 11 Power Off Sequence**

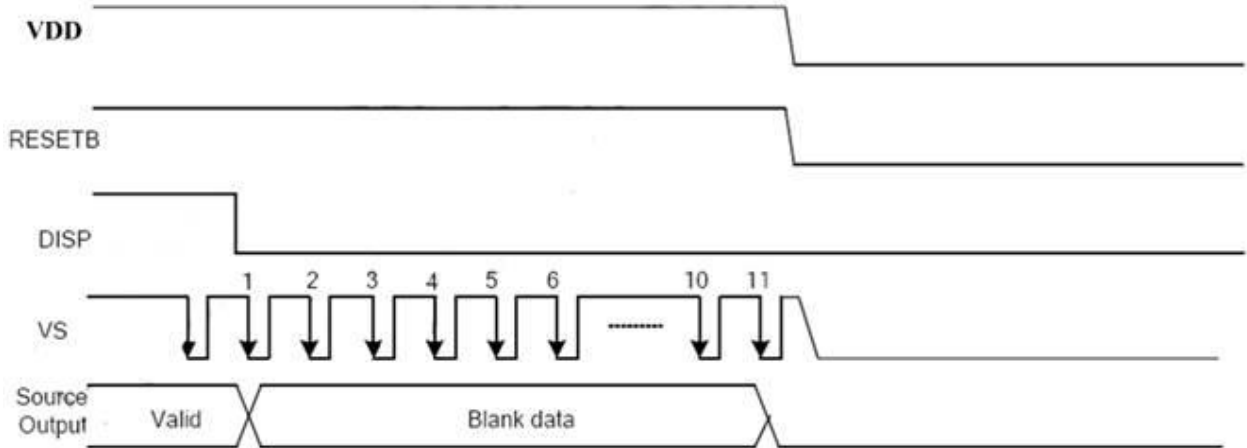

**Table 9 Power Sequencing Requirements**


Item	Unit	min	typ	max
TP1	ms	1	-	-
TP2	us	10	-	-
TP3	us	1	-	-

Document Name	M043GW32 R0 Product Information			Page 19 of 26	
Document No.		Made/Revised date	2014/04/09	Ver.	00

## 10.0 Mechanical Characteristics


### 10.1 Outline Drawing

Figure 12 Reference Outline Drawing (Front Side)

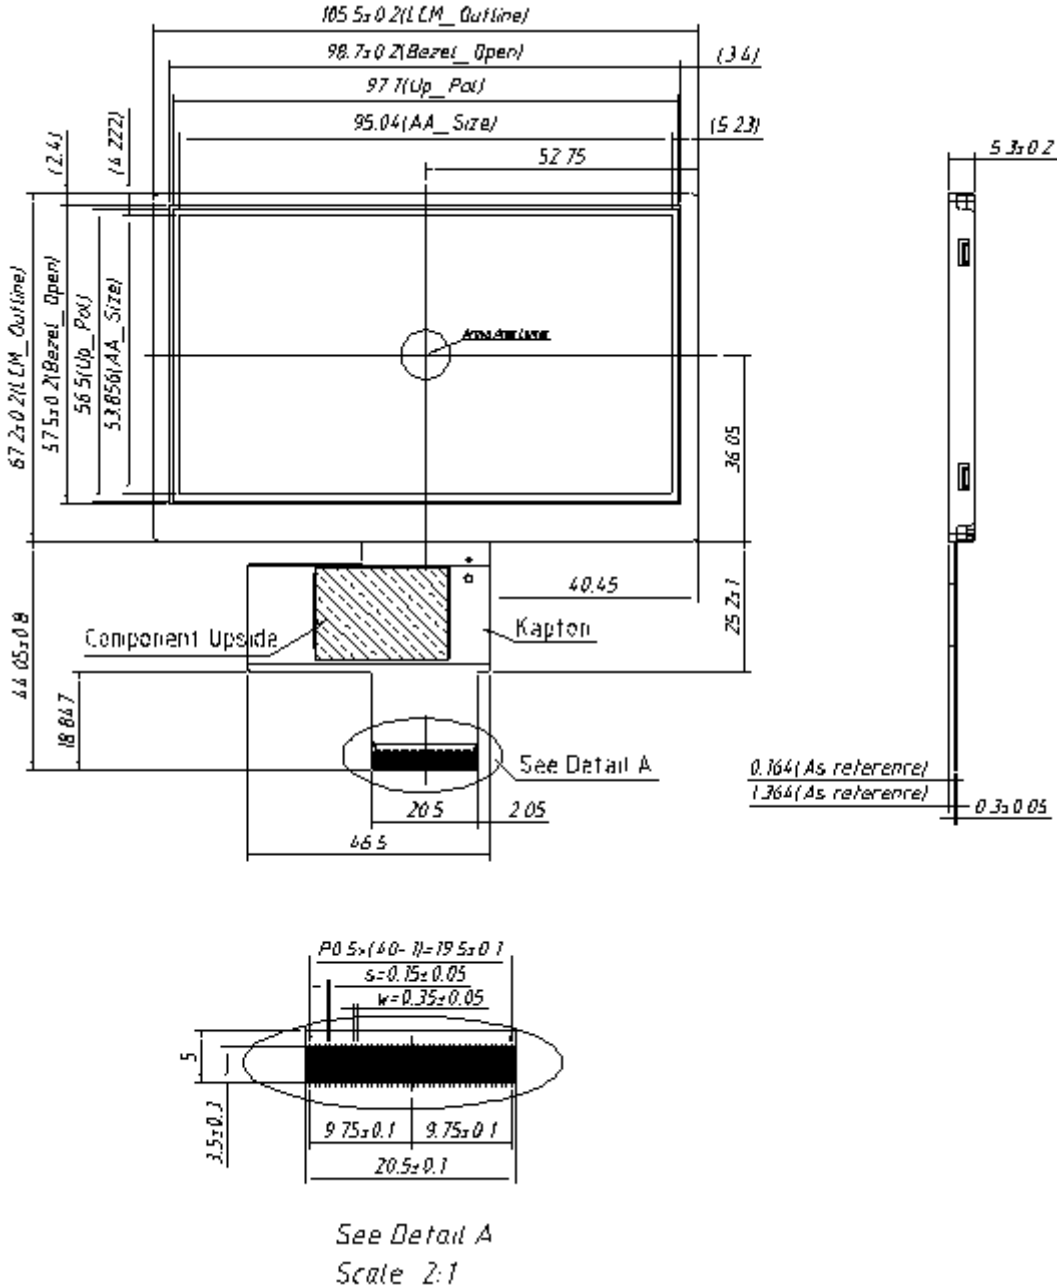

Document Name	M043GW32 R0 Product Information			Page 20 of 26	
Document No.		Made/Revised date	2014/04/09	Ver.	00

**Figure 13 Reference Outline Drawing (Back Side)**

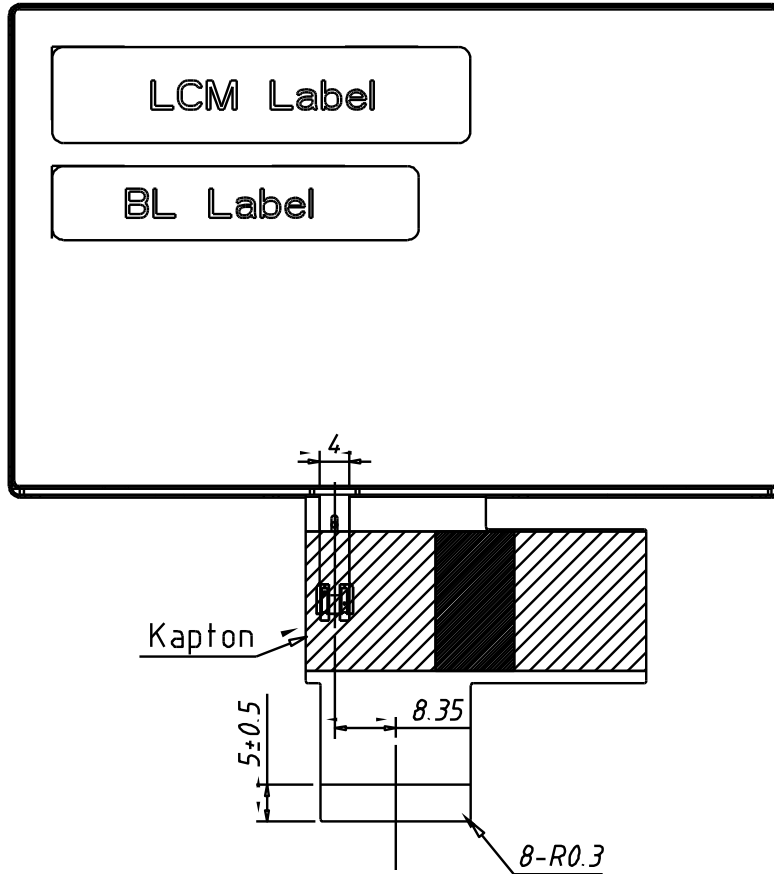


Document Name	M043GW32 R0 Product Information			Page 21 of 26	
Document No.		Made/Revised date	2014/04/09	Ver.	00

**10.2 Dimension Specifications**

**Table 10 Module Dimension Specifications**

Item	Min.	Typ.	Max.	Units
Width	(105.3)	(105.5)	(105.8)	mm
Height	(67.0)	(67.2)	(67.4)	mm
Thickness	(5.1)	(5.3)	(5.5)	mm
Weight	(54)	(60)	(66)	g
BM :   a-b   &   c-d	≤1.0			mm


**Figure 12 BM Area**

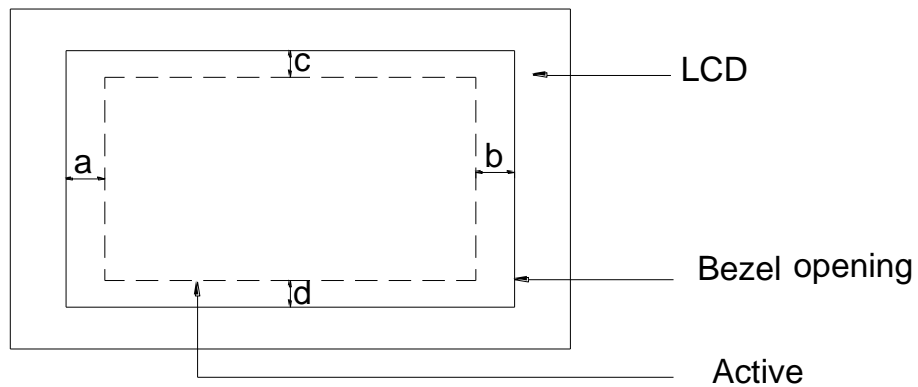



Document Name	M043GW32 R0 Product Information			Page 22 of 26	
Document No.		Made/Revised date	2014/04/09	Ver.	00

### 11.0 Package Specification

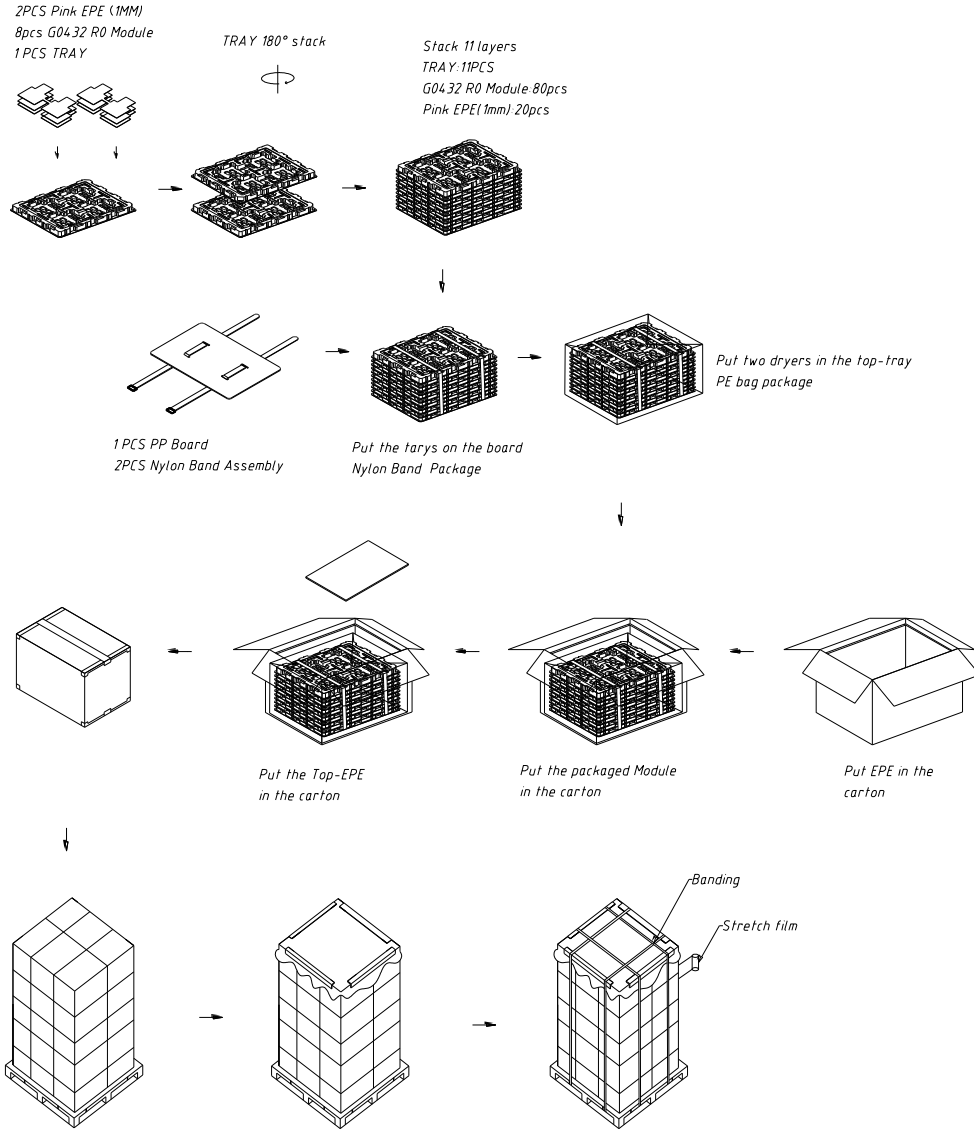

Document Name	M043GW32 R0 Product Information			Page 23 of 26	
Document No.		Made/Revised date	2014/04/09	Ver.	00

## 12.0 Reliability Conditions


Item	Package	Test Conditions	Note
High Temperature Operation Test	Module	70°C, 240hrs	1,2,3,4,5,6,
Low Temperature Operating Test	Module	-20°C, 240hrs	1,2,3,4,5,6,
High Temperature Storage Test	Module	80°C, 240hrs	1,3,4,5,6,
Low Temperature Storage Test	Module	-30°C, 240hrs	1,3,4,5,6
High Temp./High Humidity Operation Test	Module	50°C, 85%, 240hrs	1,2,3,4,5,6,
High Temp./High Humidity Storage Test	Module	50°C, 90%, 240hrs	1,3,4,5,6
Thermal Shock Non-operation Test	Module	-30°C~80°C, 1hr/each cycle,100cycles	1,3,4,5,6
Shock	Module	3 shock in each direction Peak acceleration:981m/s <sup>2</sup> Half Sine Wave; 6ms	1,5,6
Vibration	Module	1.5G, 10~500 Hz, x、y、z each axis/1h	1,5,6

### Note:

1. There is no function defect and occurrence of any new defective shall not be allowed.
2. In Operating test, the B/L voltage and current must be in spec.
3. All the judgments are under normal temperature and the sample need to be static more than 2 hours in the normal temperature before judge.
4. During measurement, the condensation water or remains shall not be allowed.
5. The minimum sample quantity of test is 3pcs.
6. There is no display function fail issue occurred, all the cosmetic specification is judged before the reliability stress.

Document Name	M043GW32 R0 Product Information			Page 24 of 26	
Document No.		Made/Revised date	2014/04/09	Ver.	00

**13.0 Lot Mark**

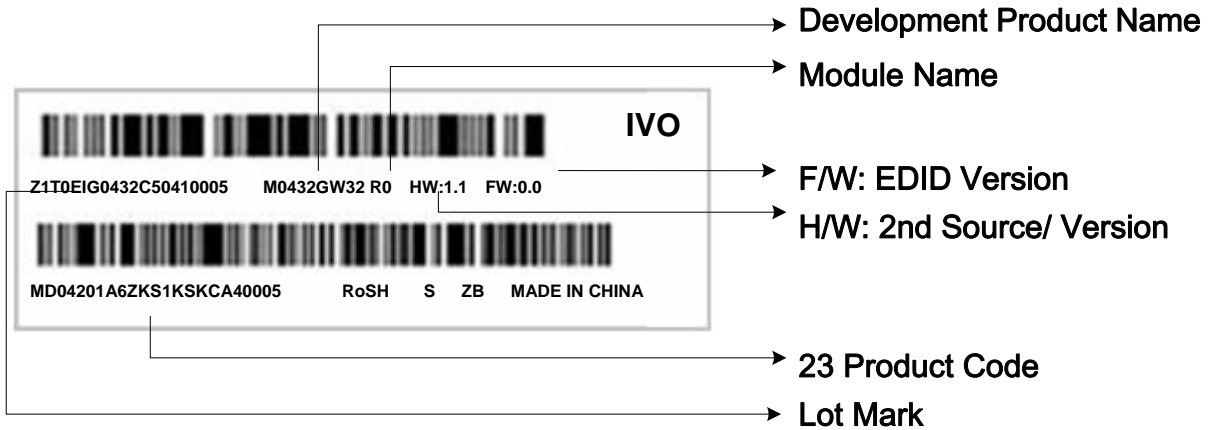

Note: This picture is only an example.

**13.1 Lot Mark**

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----

- code 1,2,4,5,6,7,8,9,10,11,16: IVO internal flow control code.
- code 3: Production location.
- code 12: Production year.
- code 13: Production month.
- code 14,15: Production date.
- code 17,18,19,20: Serial number.

Note (1) Production Year

Year	2,006	2,007	2,008	2,009	2,010	2,011	2,012	2,013	2,014	2,015
Mark	6	7	8	9	A	B	C	D	E	F

Note (2) Production Month

Month	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct	Nov.	Dec.
Mark	1	2	3	4	5	6	7	8	9	A	B	C

**13.2 23 Product Barcode**

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----

- code 1,2: Manufacture District.
- code 3,4,5,6,7: IVO internal module name.
- code 8,9,10,13,16: IVO internal flow control code.
- code 11,12: Cell location Suzhou defined as "SZ".
- code 14,15: Module line kunshan defined as "KS".
- code 17,18,19 : Year, Month, Day Refer to Note(1) and Note(2) of Lot Mark.
- code 20~23 : Serial Number.



Document Name	M043GW32 R0 Product Information			Page 25 of 26	
Document No.		Made/Revised date	2014/04/09	Ver.	00

## 14.0 General Precaution

### 14.1 Use Restriction

This product is not authorized for use in life supporting systems, aircraft navigation control systems, military systems and any other application where performance failure could be life-threatening or otherwise catastrophic.

### 14.2 Handling Precaution

- (1) Please mount LCD module by using mounting holes arranged in four corners tightly.
- (2) Do not disassemble or modify the module. It may damage sensitive parts inside LCD module, and may cause scratches or dust on the display. IVO does not warrant the module, if customers disassemble or modify the module.
- (3) If LCD panel is broken and liquid crystal spills out, do not ingest or inhale liquid Crystal, and do not contact liquid crystal with skin. If liquid crystal contacts mouth or eyes, rinse out with water immediately. If liquid crystal contacts skin or cloths, wash it off immediately with alcohol and Rinse thoroughly with water.
- (4) Disconnect power supply before handling LCD module
- (5) Refrain from strong mechanical shock and /or any force to the module.
- (6) Do not exceed the absolute maximum rating values, such as the supply voltage variation, input voltage variation, variation in parts' parameters, environmental temperature; etc otherwise LCD module may be damaged. It's recommended employing protection circuit for power supply.
- (7) Do not touch, push or rub the polarizer with anything harder than HB pencil lead. Use fingerstalls of soft gloves in order to keep clean display quality, when Persons handle the LCD module for incoming inspection or assembly.
- (8) When the surface is dusty, please wipe gently with absorbent cotton or other soft Material. When cleaning the adhesives, please use absorbent cotton wetted with a little Petroleum benzene or other adequate solvent.
- (9) Wipe off saliva or water drops as soon as possible. If saliva or water drops Contact with polarizer for a long time, they may causes deformation or color Fading.
- (10) Protection film must remove very slowly from the surface of LCD module to Prevent from electrostatic occurrence.
- (11) Because LCD module uses CMOS-IC on circuit board and TFT-LCD panel, it is Very weak to electrostatic discharge, Please be careful with electrostatic Discharge .Persons who handle the module should be grounded through adequate methods.
- (12) Do not adjust the variable resistor located on the module.

### 14.3 Storage Precaution

- (1) Please do not leave LCD module in the environment of high humidity and high temperature for a long time.
- (2) The module shall not be exposed under strong light such as direct sunlight. Otherwise, Display characteristics may be changed.
- (3) The module should be stored in a dark place. It is prohibited to apply sunlight or fluorescent light in storage.

### 14.4 Operation Precaution

- (1) Do not connect or disconnect the module in the "Power On" condition.
- (2) Power supply should always be turned on/off by "Power on/off sequence"
- (3) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference should be done by system manufacturers. Grounding and shielding

Document Name	M043GW32 R0 Product Information			Page 26 of 26	
Document No.		Made/Revised date	2014/04/09	Ver.	00

methods may be important to minimize the interference.

- (4) After installation of the TFT Module into an enclosure, do not twist nor bend the TFT Module even momentary. At designing the enclosure, it should be taken into consideration that no bending/twisting forces are applied to the TFT Module from outside. Otherwise the TFT Module may be damaged.

**14.5 Others**

- (1) Ultra-violet ray filter is necessary for outdoor operation.
- (2) Avoid condensation of water which may result in improper operation or disconnection of electrode.
- (3) If the module keeps displaying the same pattern for a long period of time, the image may be "sticked" to the screen.
- (4) This module has its circuitry PCB's on the rear side and should be handled carefully in order not to be stressed.

**14.6 Disposal**

When disposing LCD module, obey the local environmental regulations.