

Document Title	M070AWPA R1 Product Specification			Page No.	1/27
Document No.		Issue date	2020/05/21	Revision	04

## **Product Specification**

**To:**

**Product Name: M070AWPA R1**

**Document Issue Date: 2021/05/21**

<b>Customer</b>
<p><b><u>SIGNATURE</u></b></p> <p>_____</p> <p>_____</p> <p>_____</p> <p>Please return 1 copy for your confirmation with your signature and comments.</p>

<b>InfoVision Optoelectronics</b>
<p><b><u>SIGNATURE</u></b></p> <p><b>REVIEWED BY CQM</b></p> <p>_____</p> <p><b>PREPARED BY FAE</b></p> <p>_____</p>

Note : 1. Please contact InfoVision Company before designing your product based on this product.  
2. The information contained herein is presented merely to indicate the characteristics and performance of our products. No responsibility is assumed by IVO for any intellectual property claims or other problems that may result from application based on the module described herein.

**IVO InfoVision Optoelectronics ( Kunshan ) Co.,LTD.**

Document Title	M070AWPA R1 Product Specification			Page No.	2/27
Document No.		Issue date	2020/05/21	Revision	04

Revision	Date	Page	Revised Content/Summary	Remark
00	2020/11/24	--	First issued.	
01	2020/12/25	Page14 Page18	Add Timing Diagram; Add tolerance for AA area dimension;	
02	2021/04/01	Page 9 Page 25	Add Note (9); Update Lot Mark;	
03	2021/05/17	Page16	Update Note (8);	
04	2021/05/21	Page18	Update Table 8;	

Document Title	M070AWPA R1 Product Specification			Page No.	3/27
Document No.		Issue date	2020/05/21	Revision	04

## CONTENTS

<b>1.0</b>	<b>GENERAL DESCRIPTIONS .....</b>	<b>4</b>
<b>2.0</b>	<b>ABSOLUTE MAXIMUM RATINGS .....</b>	<b>6</b>
<b>3.0</b>	<b>OPTICAL CHARACTERISTICS.....</b>	<b>7</b>
<b>4.0</b>	<b>ELECTRICAL CHARACTERISTICS .....</b>	<b>10</b>
<b>5.0</b>	<b>MECHANICAL CHARACTERISTICS .....</b>	<b>19</b>
<b>6.0</b>	<b>RELIABILITY CONDITIONS.....</b>	<b>22</b>
<b>7.0</b>	<b>PACKAGE SPECIFICATION.....</b>	<b>23</b>
<b>8.0</b>	<b>LOT MARK.....</b>	<b>24</b>
<b>9.0</b>	<b>GENERAL PRECAUTION.....</b>	<b>26</b>

IVO Confidential document

Document Title	M070AWPA R1 Product Specification			Page No.	4/27
Document No.		Issue date	2020/05/21	Revision	04

## 1.0 General Descriptions

### 1.1 Introduction

The M070AWPA R1 is a Color Active Matrix Liquid Crystal Display with a back light system. The matrix uses a-Si Thin Film Transistor as a switching device. This TFT LCD has a 7.0 inch diagonally measured active display area with WVGA resolution (800 horizontal by 480 vertical pixels array).

### 1.2 Features

- Supported WVGA Resolution
- LVDS Interface
- Wide View Angle
- Compatible with RoHS Standard


### 1.3 Product Summary

Items	Specifications	Unit	
Screen Diagonal	7.0	inch	
Active Area (H x V)	152.4 x 91.44	mm	
Number of Pixels (H x V)	800 x 480	-	
Pixel Pitch (H x V)	0.1905 x 0.1905	mm	
Pixel Arrangement	R.G.B. Vertical Stripe	-	
Display Mode	Normally Black	-	
White Luminance	1,000 (Typ.)	cd /m <sup>2</sup>	
Contrast Ratio	1,000 (Typ.)	-	
Response Time	20 (Typ.)@25°C	ms	
Input Voltage	3.3 (Typ.)	V	
Power Consumption	6.046 (Max.) @ White pattern, FV=60Hz	W	
Weight	193 (Max.)	g	
Outline Dimension (H x V x D)	Without FPCA	165.82(Typ.) x 104.95(Typ.) x 7.21(Max.)	mm
	With FPCA	165.82(Typ.) x 104.95(Typ.) x 9.65(Max.)	mm
Electrical Interface (Logic)	LVDS	-	
Support Color	16.7 M	-	
NTSC	72 (Typ.)	%	
Surface Treatment	HC,3H	-	

Document Title	M070AWPA R1 Product Specification			Page No.	5/27
Document No.		Issue date	2020/05/21	Revision	04


**1.4 Functional Block Diagram**

Figure 1 shows the functional block diagram of the LCD module.

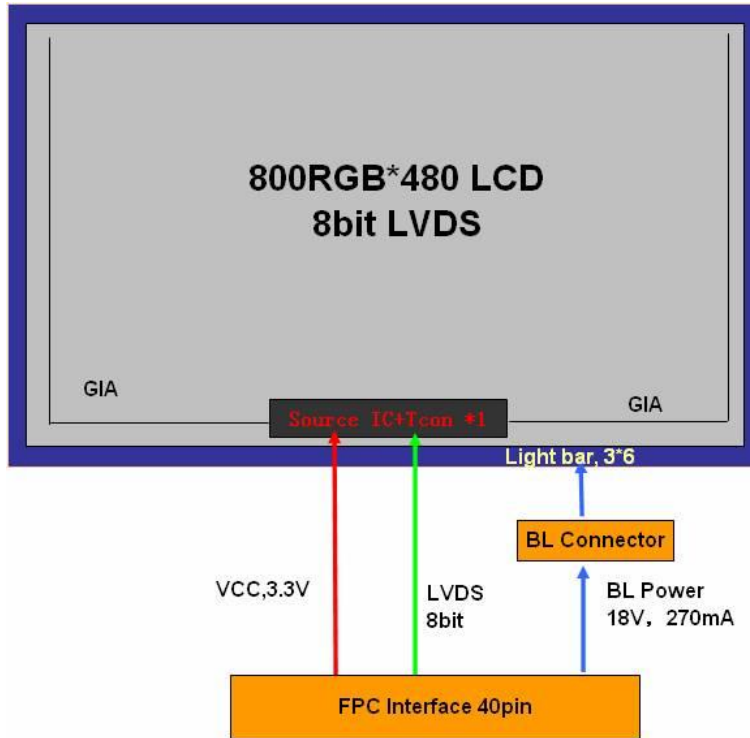

**Figure 1 Block Diagram**

**1.5 Pixel Mapping**

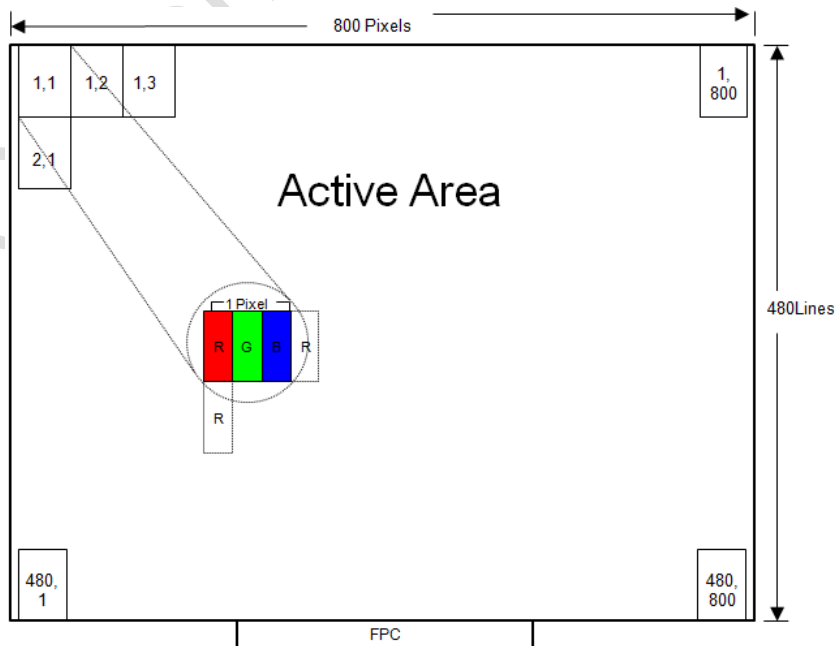

**Figure 2 Pixel Mapping**

Document Title	M070AWPA R1 Product Specification			Page No.	6/27
Document No.		Issue date	2020/05/21	Revision	04

**2.0 Absolute Maximum Ratings**

**Table 1 Electrical & Environment Absolute Rating**


Item	Symbol	Min.	Max.	Unit	Note
Logic Supply Voltage	VCC	-0.3	4.0	V	(1),(2), (3),(4)
Operating Temperature	T <sub>gs</sub>	-30	85	°C	
Storage Temperature	T <sub>a</sub>	-40	90	°C	

Note (1) All the parameters specified in the table are absolute maximum rating values that may cause faulty operation or unrecoverable damage, if exceeded. It is recommended to follow the typical value.

Note (2) All the contents of electro-optical specifications and display fineness are guaranteed under Normal Conditions. All the display fineness should be inspected under normal conditions. Normal conditions are defined as follow: Temperature: 25°C, Humidity: 55± 10%RH.

Note (3) Unpredictable results may occur when it was used in extreme conditions. T<sub>a</sub>= Ambient Temperature, T<sub>gs</sub>= Glass Surface Temperature. All the display fineness should be inspected under normal conditions.

Note (4) Temperature and relative humidity range are shown in the figure below. Wet bulb temperature should be lower than 57.8°C, and no condensation of water. Besides, protect the module from static electricity.

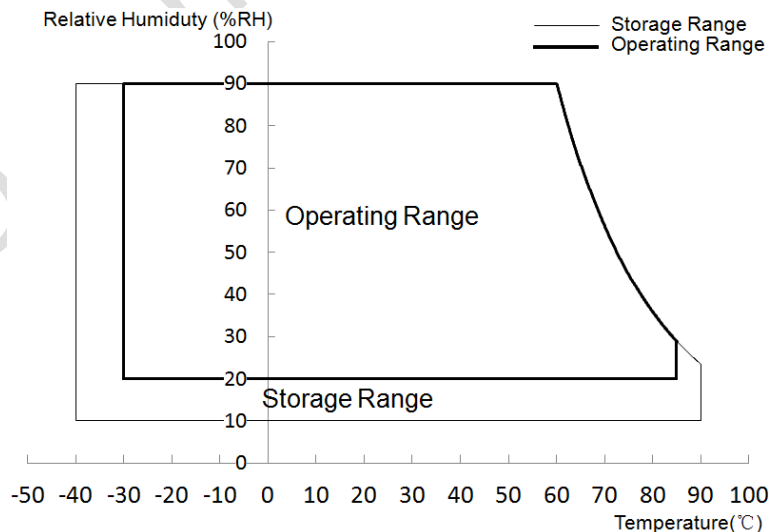

**Figure 3 Absolute Ratings of Environment of the LCD Module**

Document Title	M070AWPA R1 Product Specification			Page No.	7/27
Document No.		Issue date	2020/05/21	Revision	04

### 3.0 Optical Characteristics

The optical characteristics are measured under stable conditions as following notes.


**Table 2 Optical Characteristics**

Item	Conditions	Min.	Typ.	Max.	Unit	Note
Viewing Angle (CR≥10)	Horizontal	$\theta_{x+}$	80	85	-	degree (1),(2),(3), (4)(8)
		$\theta_{x-}$	80	85	-	
	Vertical	$\theta_{y+}$	80	85	-	
		$\theta_{y-}$	80	85	-	
Contrast Ratio	Center	800	1,000	-	-	(1),(2),(4),(8) $\theta_x=\theta_y=0^\circ$
Response Time (Rising + Falling)	25°C	-	20	30	ms	(1),(2),(5),(8) $\theta_x=\theta_y=0^\circ$
	-20°C	-	200	350	ms	
	-30°C	-	370	500	ms	
Color Chromaticity (CIE1931)	Red x	Typ. -0.04	0.636	Typ. +0.04	-	(1),(2),(3),(8) $\theta_x=\theta_y=0^\circ$
	Red y		0.330		-	
	Green x		0.310		-	
	Green y		0.630		-	
	Blue x		0.147		-	
	Blue y		0.070		-	
	White x		0.300		-	
	White y		0.320		-	
NTSC	-	68	72		%	(1),(2),(3),(8) $\theta_x=\theta_y=0^\circ$
White Luminance	Center	800	1,000		cd/m <sup>2</sup>	(1),(2),(6),(8) $\theta_x=\theta_y=0^\circ$
Luminance Uniformity(9 Points)	White	80	85		%	(1),(2),(7),(8) $\theta_x=\theta_y=0^\circ$
	Black	60	-	-		

Note (1) Measurement Setup:

The LCD module should be stabilized at given ambient temperature (25°C) for 30 minutes to avoid abrupt temperature changing during measuring. In order to stabilize the luminance, the measurement should be executed after lighting backlight for 30 minutes in the windless room.

Document Title	M070AWPA R1 Product Specification			Page No.	8/27
Document No.		Issue date	2020/05/21	Revision	04

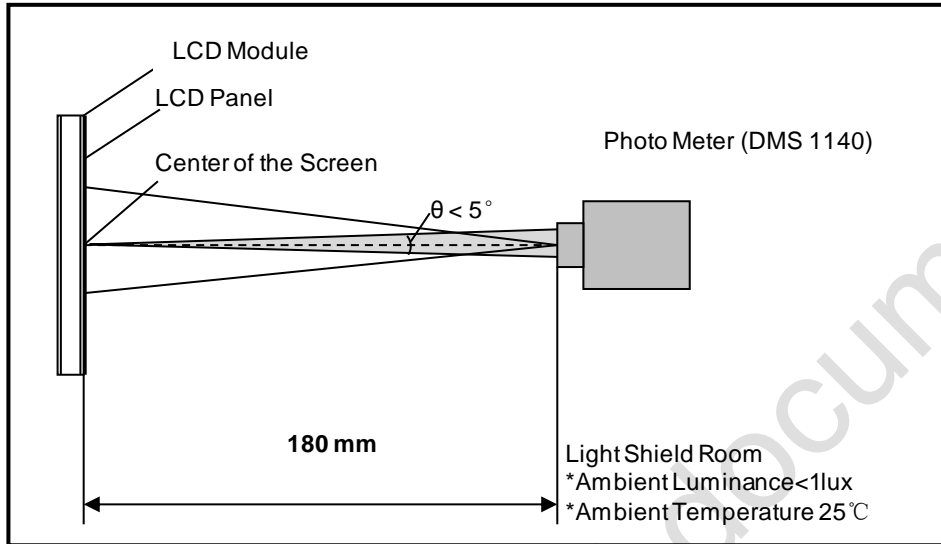


**Figure 4 Measurement Setup**

Note (2) The LED input parameter setting as:

$$I_{LED}:(270) \text{ mA}$$

Note (3) Definition of Viewing Angle

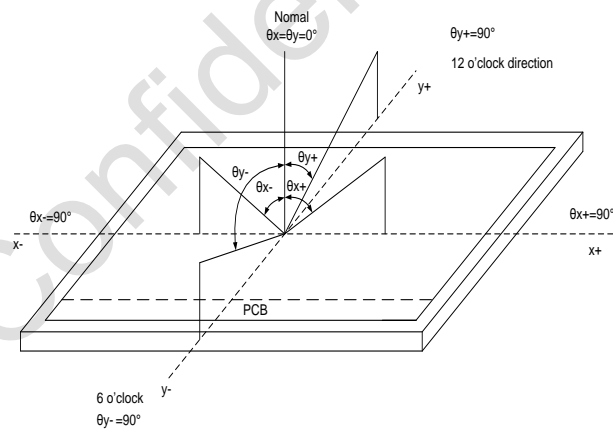

**Figure 5 Definition of Viewing Angle**

Note (4) Definition of Contrast Ratio (CR)


The contrast ratio can be calculated by the following expression:

$$\text{Contrast Ratio (CR)} = \frac{\text{The luminance of White pattern}}{\text{The luminance of Black pattern}}$$



Document Title	M070AWPA R1 Product Specification			Page No.	9/27
Document No.		Issue date	2020/05/21	Revision	04

Note (5) Definition of Response Time ( $T_R$ ,  $T_F$ )

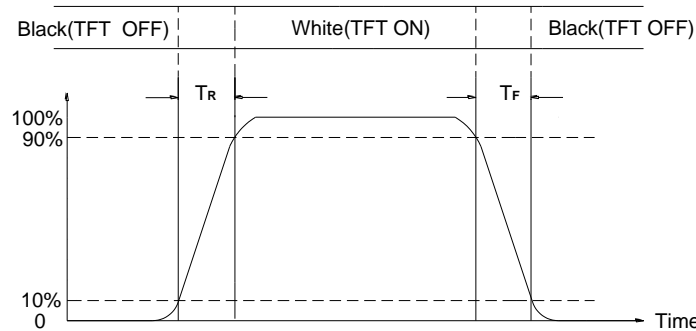

**Figure 6 Definition of Response Time**

Note (6) Definition of Luminance of White

Measure the luminance of White pattern (Ref.: Active Area)

Display Luminance= $L_1$ (center point)

H—Active Area Width, V—Active Area Height, L—Luminance


Note (7) Definition of Luminance Uniformity (Ref.: Active Area)

Measure the luminance of White pattern at X points.

Luminance Uniformity=  $\text{Min.}(L_1, L_2, \dots L_9) / \text{Max.}(L_1, L_2, \dots L_9)$

H—Active Area Width, V—Active Area Height, L—Luminance

$A=1/6 H$ ,  $B=1/6 V$

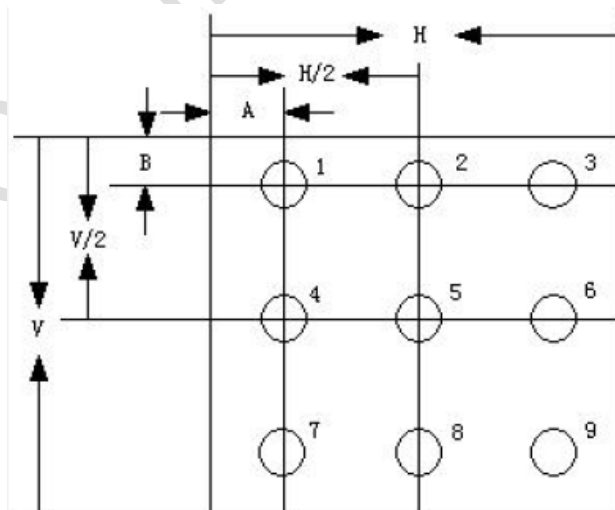

**Figure 7 Measurement Locations of 9 Points**

Note (8) All optical data are based on IVO given system & nominal parameter & testing machine in this document.

Note(9) By controlling the direction of light coming out, ALCF solves the problem of large display's reflection image on the car's front windshield.

Document Title	M070AWPA R1 Product Specification			Page No.	10/27
Document No.		Issue date	2020/05/21	Revision	04

## 4.0 Electrical Characteristics

### 4.1 Interface Connector

**Table 3 Signal Connector Type**

Item	Description
Manufacturer / Type	FH52E-40S-0.5SH

**Table 4 Signal Connector Pin Assignment**

Pin No.	Symbol	Description	Remarks
1	A	LED Anode	
2	A	LED Anode	
3	A	LED Anode	
4	NC	Not Connected	
5	K1	LED Catode1	
6	K2	LED Catode2	
7	K3	LED Catode3	
8	NTC+	Themistor	
9	NTC-	Themistor	
10	SDA	NC For IVO Test: The OTP data Input/Output for SPI interface	
11	SCL	NC For IVO Test: The OTP clock input for SPI interface	
12	VCC	Digital Power Supply	
13	VCC	Digital Power Supply	
14	GND	Ground	
15	GND	Ground	
16	CSB	NC For IVO Test: The OTP chip enable signal for SPI interface	
17	ATREN	NC For IVO Test: Enable auto reload OTP every 60 frames Active high: enable auto reload OTP Active low: disable auto reload OTP	
18	STBYB	Standby mode H: Normal Operation	

# IVO InfoVision Optoelectronics ( Kunshan ) Co.,LTD.

Document Title	M070AWPA R1 Product Specification			Page No.	11/27
Document No.		Issue date	2020/05/21	Revision	04

		L: The controller and source driver will turn off Suggest to connecting with a RC(10KΩ,2.2uF) circuit for stability	
19	VCC-OTP	NC For IVO use only: Power for OTP	
20	BIST	NC IVO Test Pin, for Bist Function H: Bist Mode, L: Normal Mode	
21	GND	Ground	
22	LVDS_Rx_IN3+	LVDS Data Input 3+	
23	LVDS_Rx_IN3-	LVDS Data Input 3-	
24	GND	Ground	
25	LVDS_CLK_IN+	LVDS Clock Input	
26	LVDS_CLK_IN-	LVDS Clock Input	
27	GND	Ground	
28	LVDS_Rx_IN2+	LVDS Data Input 2+	
29	LVDS_Rx_IN2-	LVDS Data Input 2-	
30	GND	Ground	
31	LVDS_Rx_IN1+	LVDS Data Input 1+	
32	LVDS_Rx_IN1-	LVDS Data Input 1-	
33	GND	Ground	
34	LVDS_Rx_IN0+	LVDS Data Input 0+	
35	LVDS_Rx_IN0-	LVDS Data Input 0-	
36	GND	Ground	
37	RST	Reset Pin H: normal operation L: the controller is in reset sate Suggest to connecting with a RC(10KΩ , 0.1uF) circuit for stability	
38	GND	Ground	
39	BRS	BRS signal output for external detecting BRS will keep high when input CLK/DE/LVDS signals fail	
40	GND	Ground	

Document Title	M070AWPA R1 Product Specification			Page No.	12/27
Document No.		Issue date	2020/05/21	Revision	04

**4.2 Power Voltage Specification**

4.2.1 Signal Electrical Characteristics for LVDS Receiver


The built-in LVDS receiver is compatible with (ANSI/TIA/TIA-644 ) standard.

**Table 5 LVDS Receiver Electrical Characteristics**


Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Differential Input High Threshold	V <sub>th</sub>	-	-	+100	mV	V <sub>CM</sub> =+1.2V
Differential Input Low Threshold	V <sub>tl</sub>	-100	-	-	mV	V <sub>CM</sub> =+1.2V
Magnitude Differential Input	V <sub>ID</sub>	100	-	600	mV	-
Common Mode Voltage	V <sub>CM</sub>	1	1.2	1.7- V <sub>ID</sub>  /2	V	-

Note (1) Input signals shall be low or Hi- resistance state when VCC is off.

Note (2) All electrical characteristics for LVDS signal are defined and shall be measured at the interface connector of LCD.

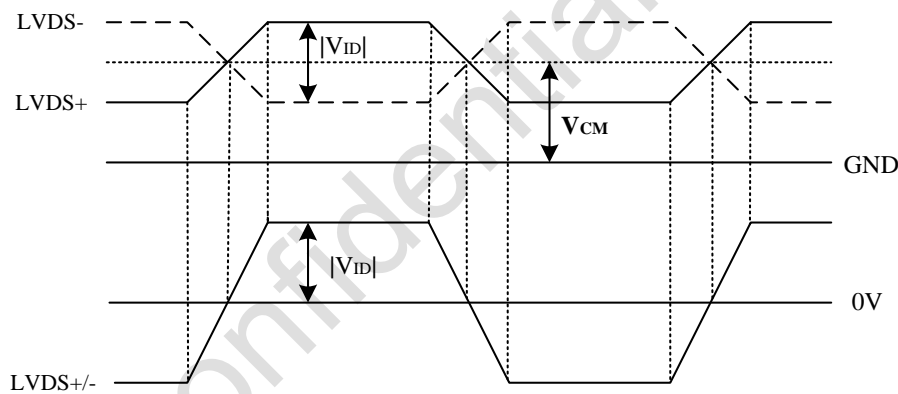


**Figure 8 Voltage Definitions**

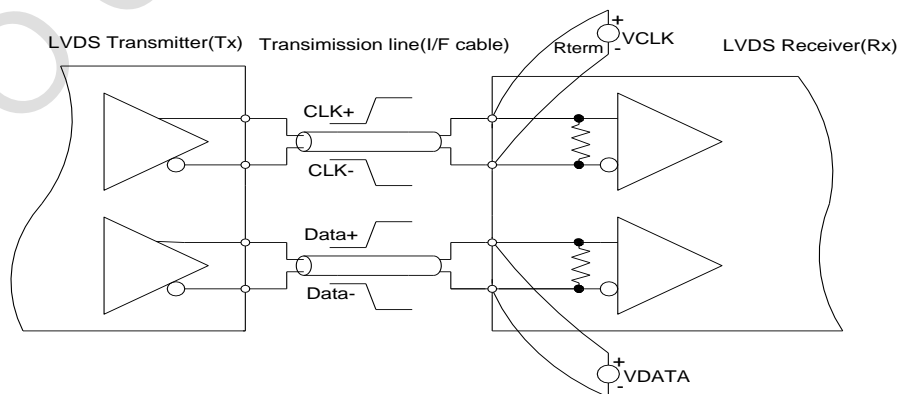

**Figure 9 Measurement System**


Document Title	M070AWPA R1 Product Specification			Page No.	13/27
Document No.		Issue date	2020/05/21	Revision	04

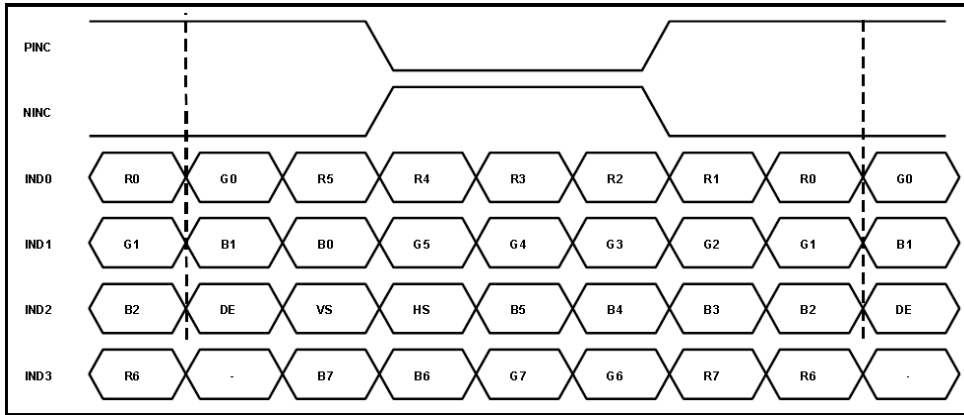

**Figure 10 Data Mapping**

**4.2.2 LVDS Receiver Internal Circuit**

Figure 11 shows the internal block diagram of the LVDS receiver. This LCD module equips termination resistors for LVDS link.

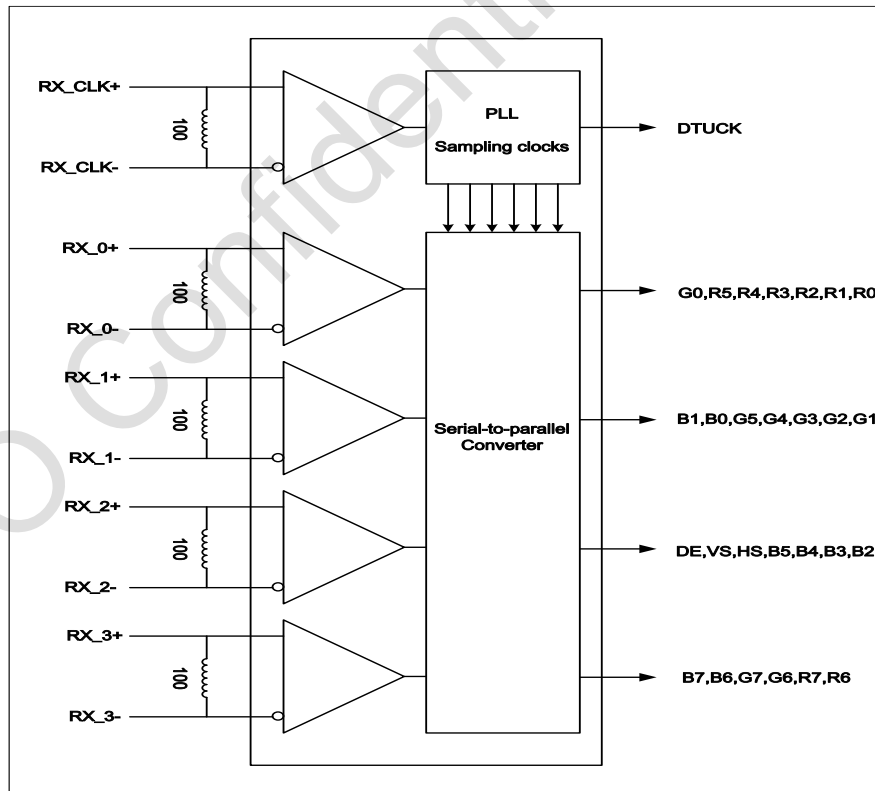

**Figure 11 LVDS Receiver Internal Circuit**

Document Title	M070AWPA R1 Product Specification			Page No.	14/27
Document No.		Issue date	2020/05/21	Revision	04

### 4.3 Timings Interface


**Table 6 Interface Timings**

Parameter	Symbol	Min.	Typ.	Max.	Unit
LVDS Clock Frequency	Fclk	24.94	27.21	29.47	MHz
H Total Time	HT	855	872	1200	Clocks
H Active Time	HA	800			
V Total Time	VT	492	520	750	Lines
V Active Time	VA	480			
Frame Rate	FV	55	60	65	Hz

Note1:  $HT * VT * \text{Frame Frequency} \leq 29.47 \text{ MHz}$

Note2: All reliabilities are specified for timing specification based on refresh rate of 60Hz.

DE Only Mode:

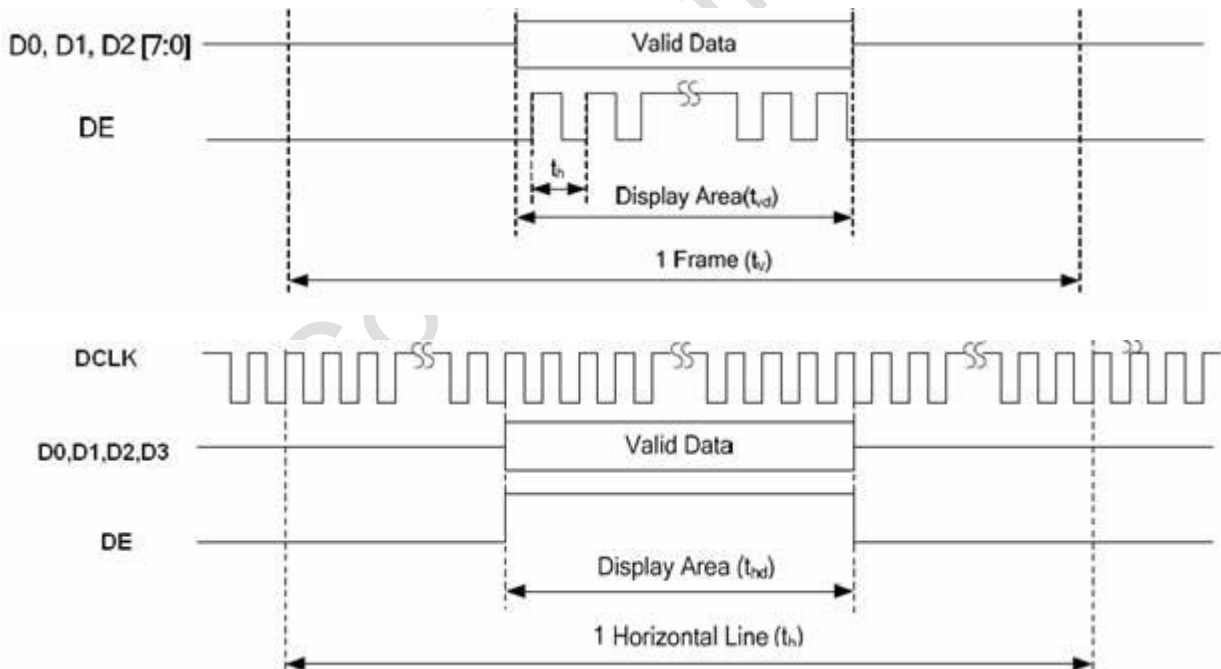

**Figure 12 Timing Diagram**

Document Title	M070AWPA R1 Product Specification			Page No.	15/27
Document No.		Issue date	2020/05/21	Revision	04

**4.4 Input Power Specifications**

Input power specifications are as follows.

**Table 7 Input Power Specifications**


Parameter	Symbol	Min.	Typ.	Max.	Unit	Note	
<i>System Power Supply</i>							
LCD Drive Voltage (Logic)	$V_{CC}$	3.0	3.3	3.6	V	(1),(2)	
VCC Current	White Pattern	$I_{CC}$	-	-	0.17	A	(1),(3)
VCC Power Consumption	White Pattern	$P_{CC}$	-	-	0.7	W	
Rush Current	$I_{Rush}$	-	-	1	A	(1),(4)	
Allowable Logic/LCD Drive Ripple Voltage	$V_{VCC-RP}$	-	-	200	mV	(1),(3)	
<i>LED Power Supply</i>							
LED Input Voltage	$V_{LED}$	16.2	18	19.8	V	(1),(2),(6)	
LED Power Consumption	$P_{LED}$	-	4.86	5.346	W	(1),(5),(6)	
LED Forward Voltage	$V_F$	2.7	3.0	3.3	V	(1),(2),(7),(8)	
LED Forward Current	$I_F$	-	90	-	mA		
LED Life Time	LT	30,000	-	-	Hours	(1),(5)	

Note (1) All of the specifications are guaranteed under normal conditions. Normal conditions are defined as follow: Temperature: 25°C, Humidity: 55± 10%RH.

Note (2) All of the absolute maximum ratings specified in the table, if exceeded, may cause faulty operation or unrecoverable damage. It is recommended to follow the typical value.

Note (3) The specified  $V_{CC}$  current and power consumption are measured under the  $V_{CC} = 3.3 V$ ,  $FV = (60) Hz$  condition and White pattern.

Note (4) The figures below is the measuring condition of  $V_{CC}$ . Rush current can be measured when  $T_{RUSH}$  is 0.5 ms.

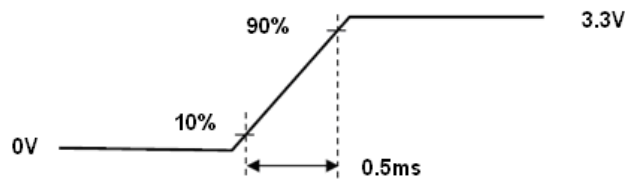


**Figure 13  $V_{CC}$  Rising Time**

Note (5) The life time is determined as the sum of the lighting time till the luminance of LCD at the typical LED current reducing to 50% of the minimum value under normal operating condition.


Document Title	M070AWPA R1 Product Specification			Page No.	16/27
Document No.		Issue date	2020/05/21	Revision	04

Note (6) Definition of VLED and PLED


$$V_{LED} = V_F \times 6, I_{LED} = I_F \times 3, PLED = V_{LED} \times I_{LED}$$

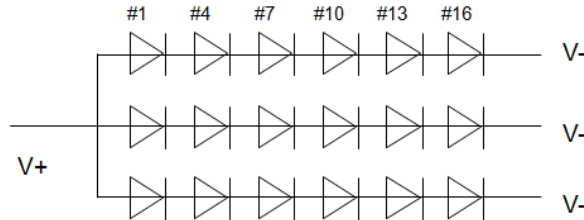

Note (7) The circuit diagram of thermistor as below



Note (8) The allowable forward current of LED vary with environmental temperature:

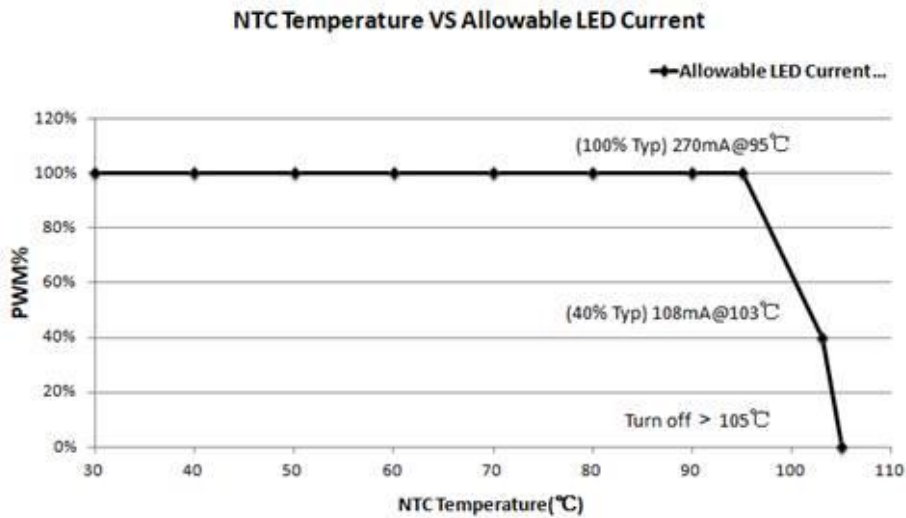

Temperature/°C	Resistance/Kohm	Temperature/°C	Resistance/Kohm
-40	195.652	60	3.014
-35	148.171	65	2.586
-30	113.347	70	2.228
-25	87.559	75	1.925
-20	68.237	80	1.669
-15	53.650	85	1.452
-10	42.506	90	1.268
-5	33.892	95	1.110
0	27.219	100	0.974



**IVO InfoVision Optoelectronics ( Kunshan ) Co.,LTD.**


Document Title	M070AWPA R1 Product Specification			Page No.	17/27
Document No.		Issue date	2020/05/21	Revision	04

5	22.021	105	0.858
10	17.926	110	0.758
15	14.674	115	0.672
20	12.081	120	0.596
25	10.000	125	0.531
30	8.315	130	0.474
35	6.948	135	0.424
40	5.834	140	0.381
45	4.917	145	0.342
50	4.161	150	0.309
55	3.535		

Document Title	M070AWPA R1 Product Specification			Page No.	18/27
Document No.		Issue date	2020/05/21	Revision	04

**4.5 Power ON/OFF Sequence**

- Interface signals are also shown in the chart. Signals from any system shall be Hi- resistance state or low level when VCC voltage is off.
- When system first start up, should keep the VCC high time longer than 200ms, otherwise may cause image sticking when VCC drop off.

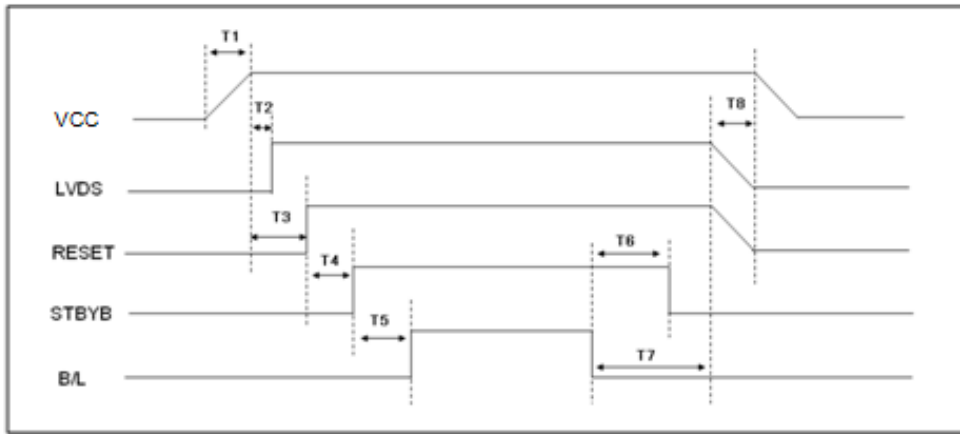

**Figure 14 Power Sequence**


**Table 8 Power Sequencing Requirements**

Parameter	Symbol	Min.	Typ.	Max.	Unit
VCC Rise Time	T1	0	-	20	ms
VCC Good to Signal Valid	T2	0	-	50	ms
VCC Good to RESET signal active	T3	10	-	-	ms
RESET active to STBYB active	T4	20	-	-	ms
STBYB active to B/L ON	T5	140	-	-	ms
B/L OFF to STBYB OFF	T6	0	-	-	ms
B/L OFF to signal OFF	T7	130	-	-	ms
All signal OFF to VCC Fall	T8	0	-	-	ms


Document Title	M070AWPA R1 Product Specification			Page No.	19/27
Document No.		Issue date	2020/05/21	Revision	04

**5.0 Mechanical Characteristics**


**5.1 Outline Drawing**

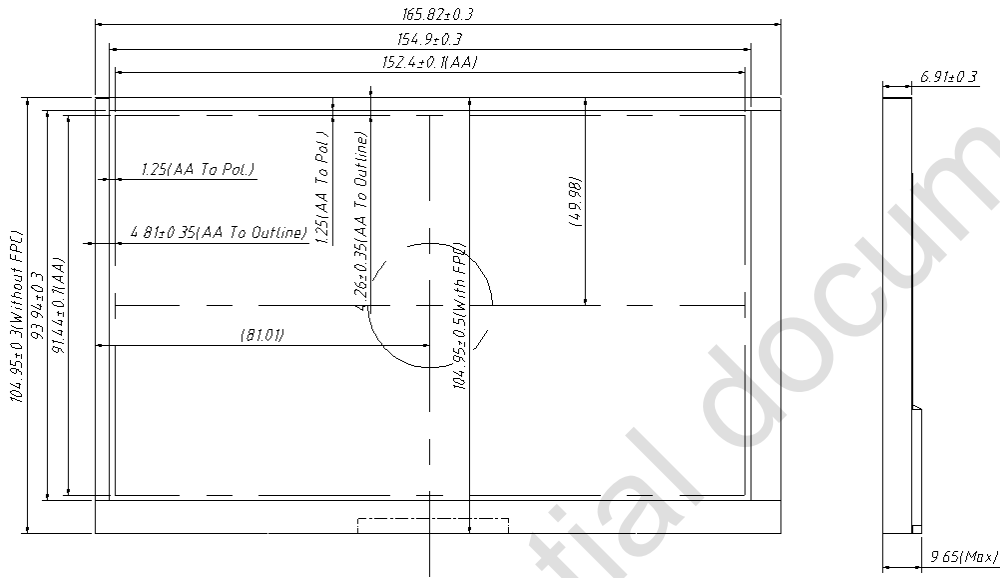

**Figure 15 Reference Outline Drawing (Front Side)**

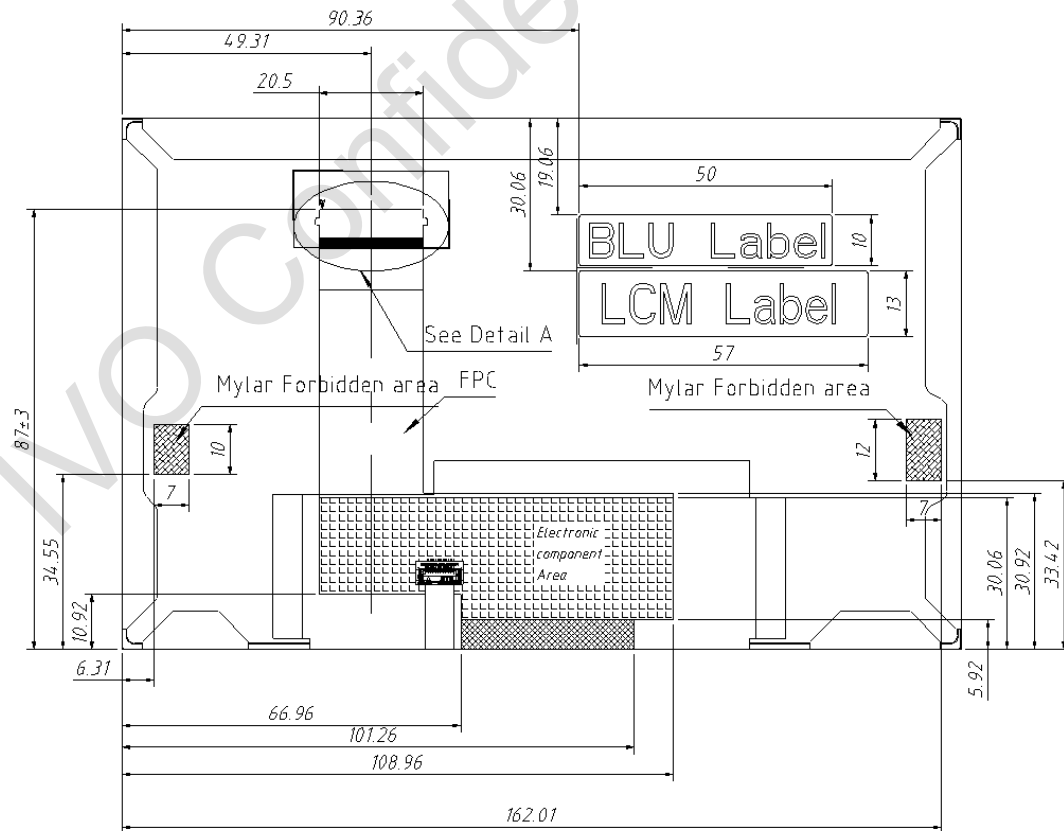

Document Title	M070AWPA R1 Product Specification			Page No.	20/27
Document No.		Issue date	2020/05/21	Revision	04

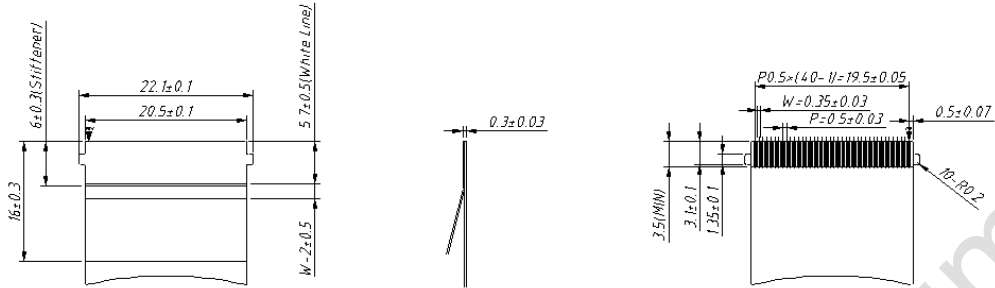

Detail A Scale 2:1

Unmarked tolerance is  $\pm 0.5\text{mm}$

Figure 16 Reference Outline Drawing (Back Side)

Document Title	M070AWPA R1 Product Specification			Page No.	21/27
Document No.		Issue date	2020/05/21	Revision	04

## 5.2 Dimension Specifications

**Table 9 Module Dimension Specifications**

Item	Min.	Typ.	Max.	Unit
Width	165.52	165.82	166.12	mm
Height With FPCA	104.45	104.95	105.45	mm
Thickness	W/O FPCA	-	7.21	mm
	With FPCA	-	9.65	mm
Weight	-	-	193	g

Note: Outline dimension measure instrument: Vernier Caliper.

Document Title	M070AWPA R1 Product Specification			Page No.	22/27
Document No.		Issue date	2020/05/21	Revision	04

## 6.0 Reliability Conditions

**Table 10 Reliability Condition**

Item	Package	Test Conditions		Note	
High Temperature/High Humidity Operating Test	Module	$T_{gs}=60^{\circ}\text{C}$ , 90%RH, 500 hours		(1),(2),(3), (4),(7)	
High Temperature Operating Test	Module	$T_{gs}=85^{\circ}\text{C}$ , 500 hours			
Low Temperature Operating Test	Module	$T_a=-30^{\circ}\text{C}$ , 500 hours			
High Temperature Storage Test	Module	$T_a=90^{\circ}\text{C}$ , 500 hours		(1),(3),(4)	
Low Temperature Storage Test	Module	$T_a=-40^{\circ}\text{C}$ , 500 hours			
Shock Non-operating Test	Module	100G,6ms,sin wave, $\pm\text{XYZ}\times 3\text{times}$ ,Total 18times		(1),(3),(5)	
Vibration Non-operating Test	Module	half-sine: Frequency: 8Hz~33Hz Stroke: 1.3mm, Sweep: 2.9G 33.3Hz ~ 400Hz X,Z, Cycle : 15 minutes 2 hrs for each direction of X,Z; 4 hours for Y direction			
ESD Test	Operating	Module	Contact	$\pm 8\text{KV}$ , 150pF(330Ohm)	(1),(2),(6)
			Air	$\pm 15\text{KV}$ , 150pF(330Ohm)	

Note (1) A sample can only have one test. Outward appearance, image quality and optical data can only be checked at normal conditions according to the IVO document before reliable test. Only check the function of the module after reliability test.

Note (2) The setting of electrical parameters should follow the typical value before reliability test.

Note (3) During the test, it is unaccepted to have condensate water remains. Besides, protect the module from static electricity.

Note (4) The sample must be released for 24 hours under normal conditions before judging.

Furthermore, all the judgment must be made under normal conditions. Normal conditions are defined as follow: Temperature:  $25^{\circ}\text{C}$ , Humidity:  $55\pm 10\%\text{RH}$ .  $T_a$ = Ambient Temperature,  $T_{gs}$ = Glass Surface Temperature.


Note (5) The module should be fixed firmly in order to avoid twisting and bending.

Note (6) It could be regarded as pass, when the module recovers from function fault caused by ESD after resetting.

Note(7) LED forward current should follow the current of LED vary with environmental temperature.

Document Title	M070AWPA R1 Product Specification			Page No.	23/27
Document No.		Issue date	2020/05/21	Revision	04

### 7.0 Package Specification

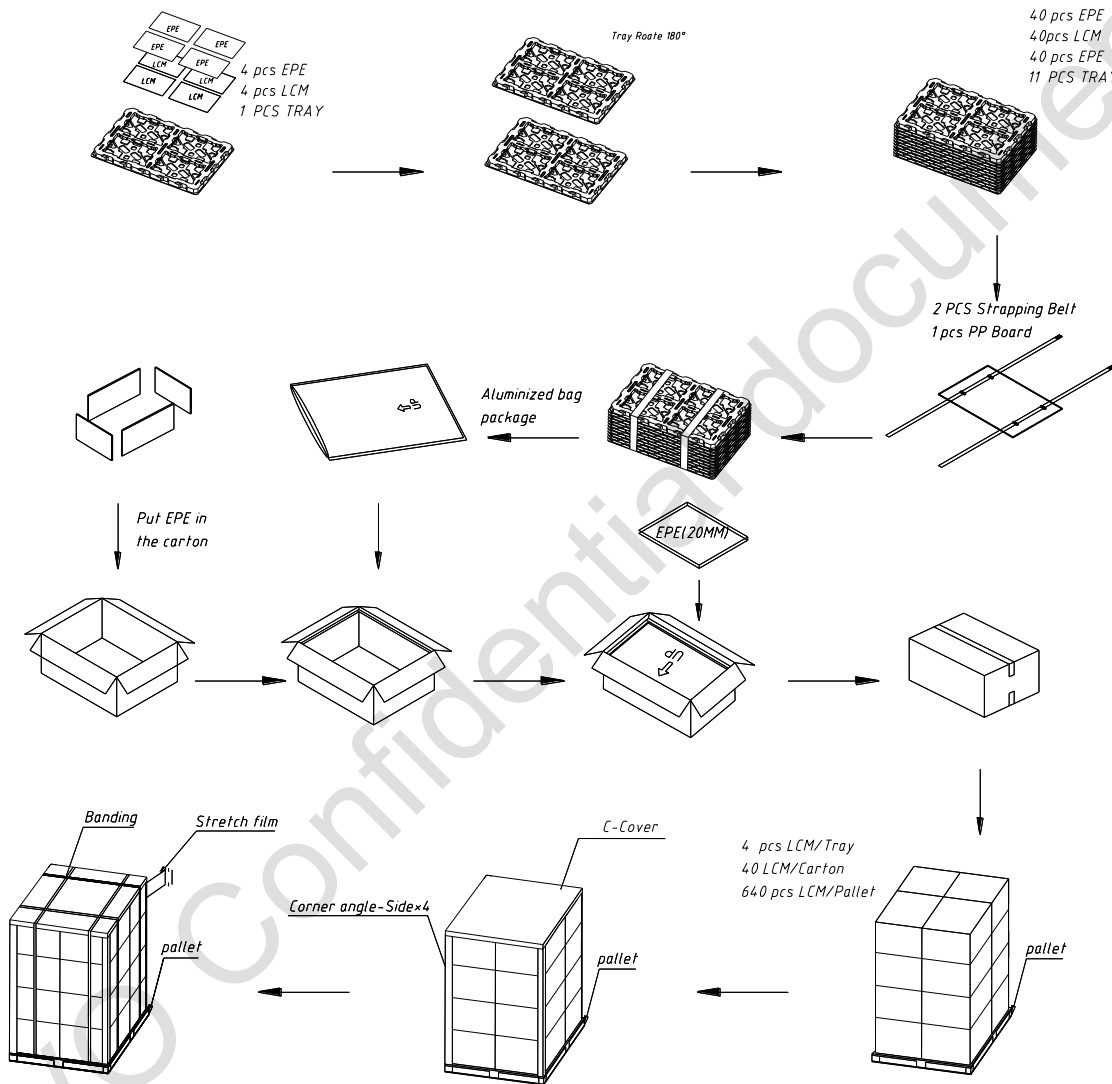

**Figure 17 Packing Method**

# IVO InfoVision Optoelectronics ( Kunshan ) Co.,LTD.

Document Title	M070AWPA R1 Product Specification			Page No.	24/27
Document No.		Issue date	2020/05/21	Revision	04

## 8.0 Lot Mark

### 8.1 Module label



Note: This picture is only an example.

#### 8.1.1 20 Lot Mark

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----

Code 1,2,4,5,6,7,8,9,10,11,16: IVO internal flow control code.

Code 3: Production Location.

Code 12: Production Year.

Code 13: Production Month.

Code 14,15: Production Day.

Code 17,18,19,20: Serial Number.

#### 8.1.2 23 Customer Code

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----

Code 1,2: Manufacture District.

Code 3,4,5,6,7: IVO internal module name.

Code 8,9,10,13,16: IVO internal flow control code.

Code 11,12: Cell location Suzhou, China defined as "KS".

Code 14,15: Module location Kunshan, China defined as "KS"; Yangzhou, China defined as "YZ"; Shenzhen, China defined as "SE"; Zhuhai, China defined as "ZH"; Suzhou, China defined as "SZ".

Code 17,18,19 : Year, Month, Day refer to Note(1), Note(2) and Note(3).

Note (1) Production Year

Year	2006	2007	2008	2009	2010	2011	2012	2013	.....	2035
Mark	6	7	8	9	A	B	C	D	.....	Z

Note (2) Production Month

Month	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct	Nov.	Dec.
Mark	1	2	3	4	5	6	7	8	9	A	B	C




# IVO InfoVision Optoelectronics ( Kunshan ) Co.,LTD.

Document Title	M070AWPA R1 Product Specification			Page No.	25/27
Document No.		Issue date	2020/05/21	Revision	04

Note (3) Production Day: 1~V.

Code 20~23 : Serial Number.

## 8.2 Carton label

型號 (Module)	M070AWPA R1
版本 (Rev.)	HW 1.1 FW 0.0
數量 (QTY)	40PCS / Carton
重量 (Weight)	10.730kg
箱號 (Carton ID)	S111E10K2ZL31200209
	
備註 (Remark)	E10Z000111 ZB

Note: This picture is only an example.

Document Title	M070AWPA R1 Product Specification			Page No.	26/27
Document No.		Issue date	2020/05/21	Revision	04

## 9.0 General Precaution

### 9.1 Using Restriction

This product is not authorized for using in life supporting systems, aircraft navigation control systems, military systems and any other appliance where performance failure could be life-threatening or lead to be catastrophic.

### 9.2 Operation Precaution

(1) The LCD product should be operated under normal conditions.

Normal conditions are defined as below:

Temperature: 25°C

Humidity: 55±10%

Display pattern: continually changing pattern (Not stationary)

(2) Brightness and response time depend on the temperature. (It needs more time to reach normal brightness in low temperature.)

(3) It is necessary for you to pay attention to condensation when the ambient temperature drops suddenly. Condensate water would damage the polarizer and electrical contacted parts of the module. Besides, smear or spot will remain after condensate water evaporating.

(4) If the absolute maximum rating value was exceeded, it may damage the module.

(5) Do not adjust the variable resistor located on the module.

(6) Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding may be important to minimize the interference.

(7) Image sticking may occur when the module displayed the same pattern for long time.

(8) Do not connect or disconnect the module in the "power on" condition. Power supply should always be turned on/off by the "power on/off sequence"

(9) Ultra-violet ray filter is necessary for outdoor operation.

### 9.3 Mounting Precaution

(1) All the operators should be electrically grounded and with Ion-blown equipment turning on when mounting or handling. Dressing finger-stalls out of the gloves is important for keeping the panel clean during the incoming inspection and the process of assembly.

(2) It is unacceptable that the material of cover case contains acetic or chloric. Besides, any other material that could generate corrosive gas or cause circuit break by electro-chemical reaction is not desirable.

(3) The case on which a module is mounted should have sufficient strength so that external force is not transmitted to the module directly.

(4) It is obvious that you should adopt radiation structure to satisfy the temperature specification.

(5) So as to acquire higher luminance, the cable of the power supply should be connected directly with a minimize length.

(6) It should be attached to the system tightly by using all holes for mounting, when the module is

Document Title	M070AWPA R1 Product Specification			Page No.	27/27
Document No.		Issue date	2020/05/21	Revision	04

assembled. Be careful not to apply uneven force to the module, especially to the PCB on the back.

(7) A transparent protective film needs to be attached to the surface of the module.

(8) Do not press or scratch the polarizer exposed with anything harder than HB pencil lead. In addition, don't touch the pin exposed with bare hands directly.

(9) Clean the polarizer gently with absorbent cotton or soft cloth when it is dirty.

(10) Wipe off saliva or water droplet as soon as possible. Otherwise, it may cause deformation and fading of color.

(11) Clean the panel gently with absorbent cotton or soft cloth when it is dirty. Ethanol( $C_2H_5OH$ ) is allowed to be used. Ketone (ex. Acetone), Toluene, Ethyl acid, Methyl chloride, etc are not allowed to be used for cleaning the panel, which might react with the polarizer to cause permanent damage.

(12) Do not disassemble or modify the module. It may damage sensitive parts in the LCD module, and cause scratches or dust remains. IVO does not warrant the module, if you disassemble or modify the module.

#### **9.4 Handling Precaution**

(1) Static electricity will generate between the film and polarizer, when the protection film is peeled off. It should be peeled off slowly and carefully by operators who are electrically grounded and with Ion-blown equipment turning on. Besides, it is recommended to peel off the film from the bonding area.

(2) The protection film is attached to the polarizer with a small amount of glue. When the module with protection film attached is stored for a long time, a little glue may remain after peeling.

(3) If the liquid crystal material leaks from the panel, keep it away from the eyes and mouth. In case of contact with hands, legs or clothes, it must be clean with soap thoroughly.

#### **9.5 Storage Precaution**

When storing modules as spares for long time, the following precautions must be executed.

(1) Store them in a dark place. Do not expose to sunlight or fluorescent light. Keep the temperature between  $5^{\circ}C$  and  $35^{\circ}C$  at normal humidity.

(2) The polarizer surface should not come in contact with any other object. It is recommended that they be stored in the container in which they were shipped.

(3) It is recommended to use it in a short-time period, after it's unpacked. Otherwise, we would not guarantee the quality.

#### **9.6 Others**

When disposing LCD module, obey the local environmental regulations.